

Ecosine Flex, 400-480 VAC 60 Hz 10% THDi Passive Harmonic Filters



- Reduce THDi to 10% (15% if no DC-Link present in the drive)
- Filters for diode rectifier with and without DC-link choke and thyristor rectifier
- Help to comply with EN 61000-3-12, IEEE 519 and other PQ standards
- Increase the efficiency of energy utilization
- Most compact design
- Plug and play, ready to use



Approvals & Compliances



UL pending

Features and Benefits

FN3458 (60 Hz) models of the Ecosine Flex product family represent the very compact economical series with a THDi performance of <10% for drives with 4% Ldc and <15% for drives without Ldc.

They are ideal for non-linear three-phase equipment with B6 rectifier front-end that do not require the industry leading <5% THDi performance provided by Schaffner Ecosine Evo filters.

The performance targets the requirement of EN 61000-3-12 and IEEE 519 for $I_{sc}/I_L < 50$. Schaffner Ecosine filters help to unburden the electrical infrastructure from excess loading and heat caused by current harmonics, and therefore support a better utilization of electric system capacity.

Lower harmonics also reduce the risk of system resonances and potential downtime of sensitive electronic equipment.

FN3458 filters upgrade standard motor drives to low-harmonic drives quickly and easily.

Typical Applications


- Equipment with front-end six-pulse rectifier
- Motor drives
- Factory automation equipment
- Water/wastewater treatment facilities
- Fan and pump applications
- HVAC installations
- Mission-critical processes

Technical Specifications

Nominal operating voltage	3x 380 to 480 VAC ±10%
Operating frequency	60 Hz ±1 Hz
Nominal motor drive input power rating	5 to 300 HP @ 480 VAC
Total harmonic current distortion THDi*	<10% @ rated power (with DC-Link choke 4%) <15% @ rated power (without DC-Link choke or <4%)
Total demand distortion TDD	According to IEEE 519
Efficiency	≥ 98% at rated voltage and power
Overload capability	1.6x rated current for 1 minute, once per hour
SCCR**	100 kA
High potential test voltage	P -> E 2480 VAC for 1 s
Oversvoltage category	OV III (IEC 60664-1 / UL 61800-5-1)
Earthing System	TN, TT, IT
Protection category	IP 00, IP 20
Cooling	Internal fan cooling or external fan cooling***
Ambient temperature range	-25°C to +45°C fully operational **** +45°C to +70°C derated operation ***** -25°C to +85°C transport and storage
Design corresponding to	UL/IEC 61800-5-1, EN 61800-5-1, CE (LVD2006/95/EC) Choke: IEC 61558-2-20
Flammability corresponding to	UL 94 V-2
MTBF @ 45°C/480 V (Mil-HB-217F)	>300'000 hours

* System requirements: THDv <2%, line voltage unbalance <1%
Note: performance specifications in this datasheet refer to six-pulse diode rectifiers. SCR rectifier front-end will produce different results, depending upon the firing angle of the thyristors.
** External UL-rated fuses required.
*** Please check the inlet air flow requirement for cooling, see below in this document and in the user and installation manual.
**** Except 300 HP versions that have a maximum nominal temperature of 40°C.
***** Derated = $I_{nominal} * \sqrt{((T_{max}-T_{amb})/(T_{max} - T_{nom}))}$ with $T_{max} = 70°C$, $T_{nom} = 45°C$ (or 40°C for 300 HP versions)

Typical electrical schematic

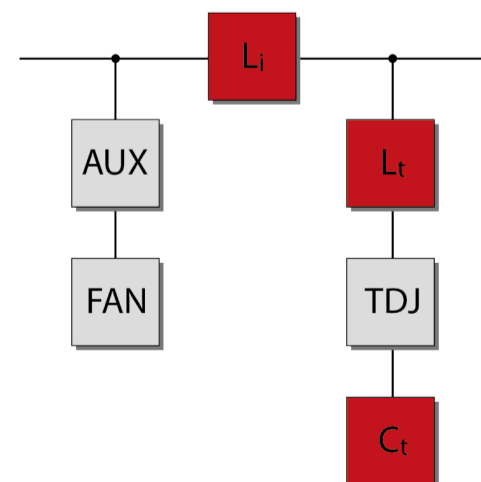

Filter Selection Table

Filter	Rated load power @480 V/60 Hz		Rated load power @380 V/60 Hz		Motor drive input current [Arms]*	Rated filter input current [Arms]	Weight		Typical losses [W]**	Input /output terminals Type	TDJ terminals Type	Frame size
	[kW]	[HP]	[kW]	[HP]			[kg]	[lbs]				
FN3458-5-44-E0XXJXX	3.7	5	3	4	6.7	4.6	9	20	60	-44	-44	A
FN3458-8-44-E0XXJXX	5.6	7.5	4.4	6	10	6.9	9	20	117	-44	-44	A
FN3458-10-44-E0XXJXX	7.5	10	5.9	8	13.4	9.2	13.3	29	99	-44	-44	A
FN3458-15-33-E0XXJXX	11.2	15	8.9	12	20	13.8	16.2	36	174	-33	-44	B
FN3458-20-33-E0XXJXX	14.9	20	12	16	27	18.5	18.3	40	253	-33	-44	B
FN3458-25-33-E0XXJXX	19	25	15	20	34	23.0	20.9	46	307	-33	-44	B
FN3458-30-33-E0XXJXX	22	30	18	24	41	27.7	25.6	56	380	-33	-44	B
FN3458-40-34-E0XXJXX	30	40	24	32	54	36.9	33.5	74	336	-34	-33	C
FN3458-50-34-E0XXJXX	37	50	30	40	67	46.2	40	88	412	-34	-33	C
FN3458-60-35-E0XXJXX	45	60	36	48	81	55.9	42.5	94	466	-35	-33	D
FN3458-75-35-E0XXJXX	56	75	45	60	99	69.0	45.2	99	490	-35	-33	D
FN3458-100-40-E0XXJXX	75	100	60	80	131	92.2	78	172	634	-40	-34	E
FN3458-125-40-E0XXJXX	93	125	75	100	162	115	83.5	184	805	-40	-34	E
FN3458-150-40-E0XXJXX	112	150	89	120	191	139	91.5	201	615	-40	-34	E
FN3458-200-99-E0XXJXX	149	200	119	160	253	185	101	222	843	-99	-35	F
FN3458-250-99-E0XXJXX	186	250	149	200	311	231	112	246	910	-99	-35	F
FN3458-300-99-E0XXJXX	224	300	179	240	368	280	122	268	1026	-99	-40	G

* Filter to be selected by system voltage and load (motor drive) power. Note: the harmonic filter will reduce RMS input current. Therefore, filter selection by current rating, as it is common for EMC/EMI filters, is not recommended.

** Calculated power losses at 25°C, 400 V, 50 Hz and rated load power.

Mechanical Data IP00

Filter Terminals

Terminal designation	LxWxH [mm]	Stranded wire [AWG]	Stranded wire [mm ²]	Solid wire [mm ²]	Rec. Torque [Nm]	Ring cable shoe
-44	21.9x10x28	20 - 8	0.5 - 6	0.5 - 10	1.0 - 1.2	-
-33	25x11x32	20 - 6	0.5 - 10	0.5 - 16	1.5 - 1.8	-
-34	39x18.5x50.5	10 - 2	6 - 25	6 - 35	4.0 - 4.5	-
-35	45x20x55.5	6 - 1/0	16 - 50	10 - 50	7.0 - 8.0	-
-40	51x25x72.5	1/0 - 4/0	50 - 95	50 - 95	17 - 20	-
-99	79x6x25	-	-	-	-	M10
TS	20.5x10x10.9	24 - 10	0.5 - 4	0.5 - 6	0.7 - 0.8	-

Earth Terminal

Frame size	Screw thread	Screw torque [Nm]
A	M6	4.0
B, C	M8	9.0
D, E, F, G	M10	17.0

Inlet Air Flow Required For Cooling

Frame size	Min air volume*	
	[m ³ /h]	[CFM]
A	0	0
B, C, D	204	120
E (100 and 150 HP only)	408	240
E (125 HP only)	612	360
F, G	612	360

* External air flow required for filter configurations without embedded ventilation

Filter Selection Table

Filter	Rated load power @480 V/60 Hz		Rated load power @380 V/60 Hz		Motor drive input current [Arms]**	Rated filter input current [Arms]	Weight		Typical losses [W]***	Input /output terminals Type	TDJ terminals Type	Frame size
	[kW]	[HP]	[kW]	[HP]			[kg]	[lbs]				
FN3458-5-44-E2XXJXX*	3.7	5	3	4	6.7	4.6	10	22	60	-44	-44	A
FN3458-8-44-E2XXJXX*	5.6	7.5	4.4	6	10	6.9	10	22	117	-44	-44	A
FN3458-10-44-E2XXJXX*	7.5	10	5.9	8	13.4	9.2	14.7	32	99	-44	-44	A
FN3458-15-33-E2FAJXX	11.2	15	8.9	12	20	13.8	18	40	174	-33	-44	B
FN3458-20-33-E2FAJXX	14.9	20	12	16	27	18.5	19.8	44	253	-33	-44	B
FN3458-25-33-E2FAJXX	19	25	15	20	34	23.0	23.4	51	307	-33	-44	B
FN3458-30-33-E2FAJXX	22	30	18	24	41	27.7	28.2	62	380	-33	-44	B
FN3458-40-34-E2FAJXX	30	40	24	32	54	36.9	37	81	336	-34	-33	C
FN3458-50-34-E2FAJXX	37	50	30	40	67	46.2	43	95	412	-34	-33	C
FN3458-60-35-E2FAJXX	45	60	36	48	81	55.9	46	101	466	-35	-33	D
FN3458-75-35-E2FAJXX	56	75	45	60	99	69.0	48.5	107	490	-35	-33	D
FN3458-100-40-E2FAJXX	75	100	60	80	131	92.2	83	183	634	-40	-34	E
FN3458-125-40-E2FAJXX	93	125	75	100	162	115	88.5	195	805	-40	-34	E
FN3458-150-40-E2FAJXX	112	150	89	120	191	139	97.5	215	615	-40	-34	E
FN3458-200-99-E2FAJXX	149	200	119	160	253	185	109	240	843	-99	-35	F
FN3458-250-99-E2FAJXX	186	250	149	200	311	231	120	264	910	-99	-35	F
FN3458-300-99-E2FAJXX	224	300	179	240	368	280	130	286	1026	-99	-40	G

* Filter rating which does not require forced cooling or fan module

** Filter to be selected by system voltage and load (motor drive) power. Note: the harmonic filter will reduce RMS input current. Therefore, filter selection by current rating, as it is common for EMC/EMI filters, is not recommended.

*** Calculated power losses at 25°C, 400 V, 50 Hz and rated load power.



Filter Terminals

Terminal designation	LxWxH [mm]	Stranded wire [AWG]	Stranded wire [mm ²]	Solid wire [mm ²]	Rec. Torque [Nm]	Ring cable shoe
-44	21.9x10x28	20 - 8	0.5 - 6	0.5 - 10	1.0 - 1.2	-
-33	25x11x32	20 - 6	0.5 - 10	0.5 - 16	1.5 - 1.8	-
-34	39x18.5x50.5	10 - 2	6 - 25	6 - 35	4.0 - 4.5	-
-35	45x20x55.5	6 - 1/0	16 - 50	10 - 50	7.0 - 8.0	-
-40	51x25x72.5	1/0 - 4/0	50 - 95	50 - 95	17 - 20	-
-99	79x6x25	-	-	-	-	M10
TS	20.5x10x10.9	24 - 10	0.5 - 4	0.5 - 6	0.7 - 0.8	-

Earth Terminal

Frame size	Screw thread	Screw torque [Nm]
A	M6	4.0
B, C	M8	9.0
D, E, F, G	M10	17.0

Mechanical Data IP00

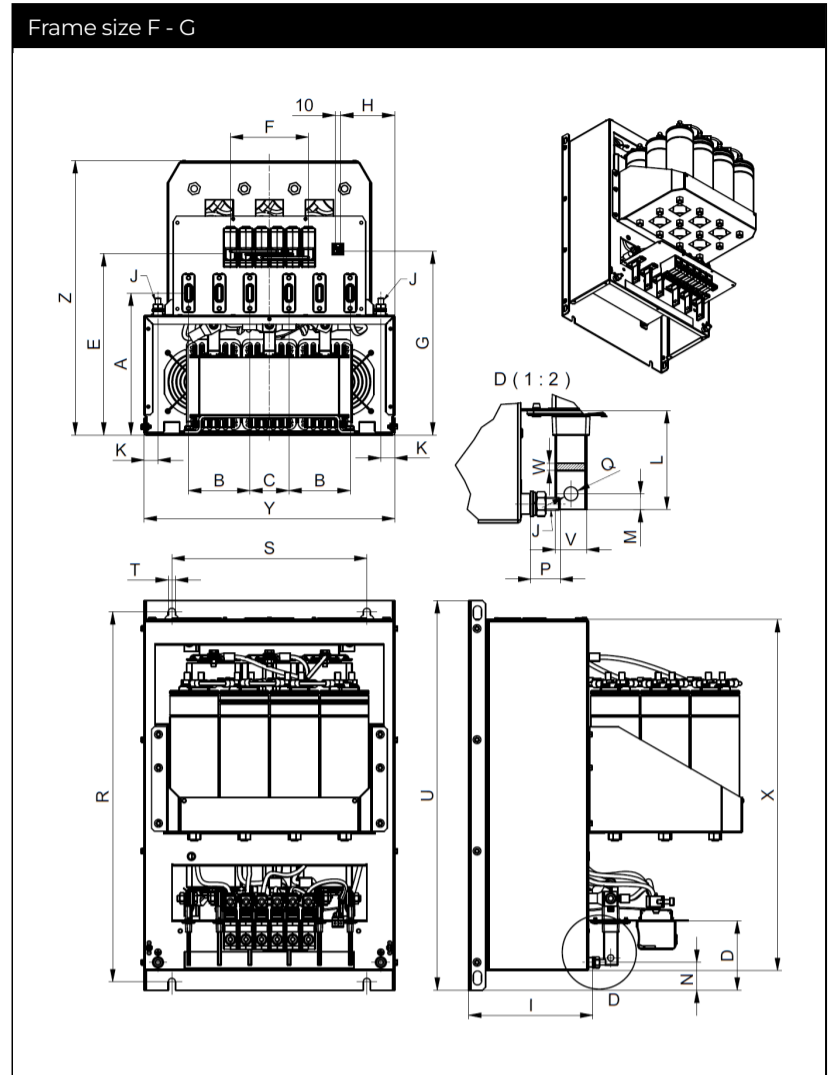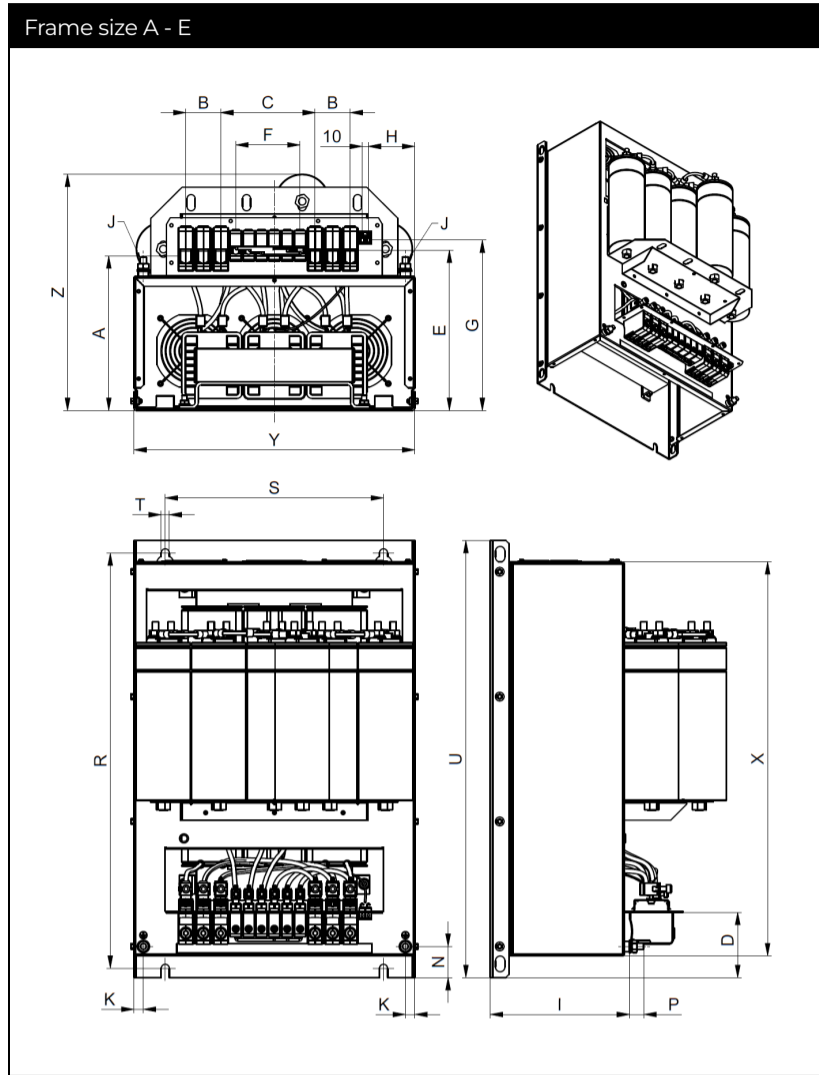

Dimensions

Frame size	A	B	C	D	E	F	G	H	I	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	Z
A	132	23	81	63	132	58	90	22	119	12			35	18		370	140	9	390			349	185	170
B	161	24	82	68	161	58	165	49	146	15			39	21		435	200	11	455			402	250	220
C	176	38	89	78	179	58	188	43	154	15			40	21		500	225	11	520			467	280	238
D	178	42	98	93	165	64	198	115	156	15			44	23		555	225	11	580			522	280	238
E	247	56	151	105	257	103	273	74	223	15			50	23		665	350	13	700			631	450	380
F	255	110	70	125	313	140	325	97	223	25	79	13	50	23	11	665	350	13	700	25	6	631	450	380
G	255	110	70	125	326	140	325	97	223	25	79	13	50	23	11	665	350	13	700	25	6	631	450	495



All dimensions in mm; 1 inch = 25.4 mm

Tolerances according to: ISO 2768-m/EN 22768-m

Installation

For more detailed information and step by step installation guidelines, please consult the user manual at www.schaffner.com.

Mechanical Data IP20

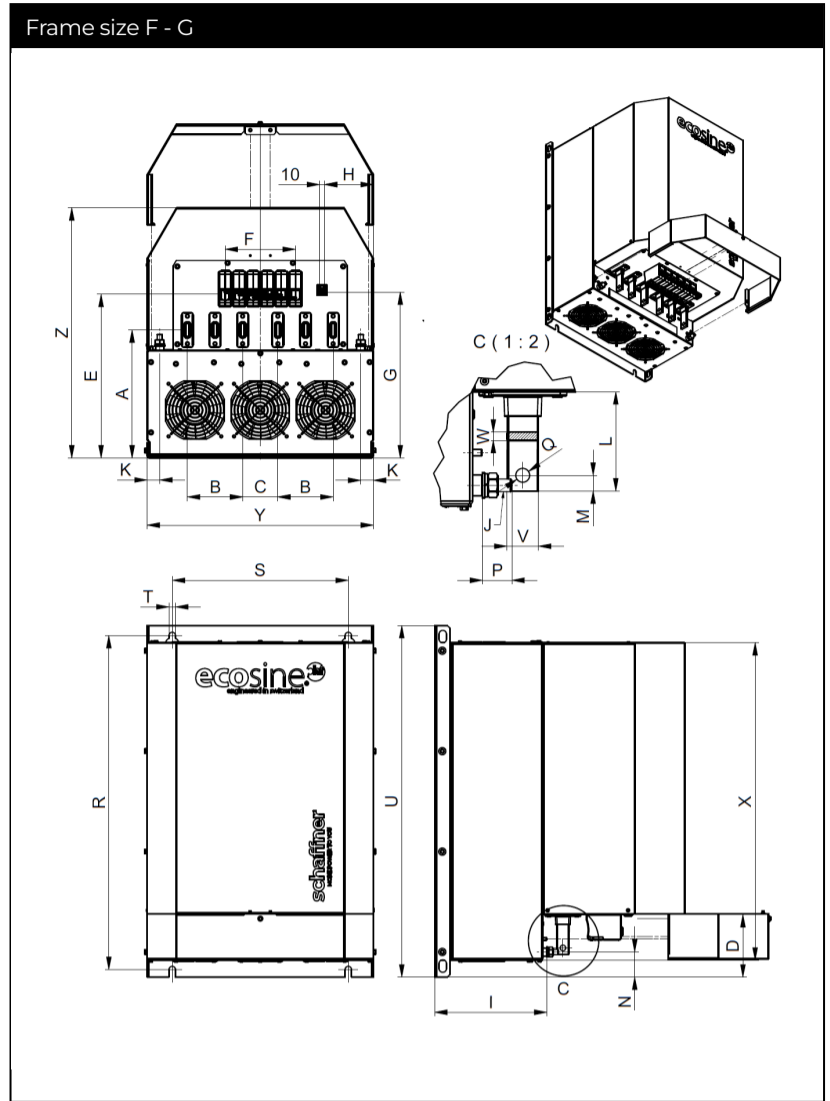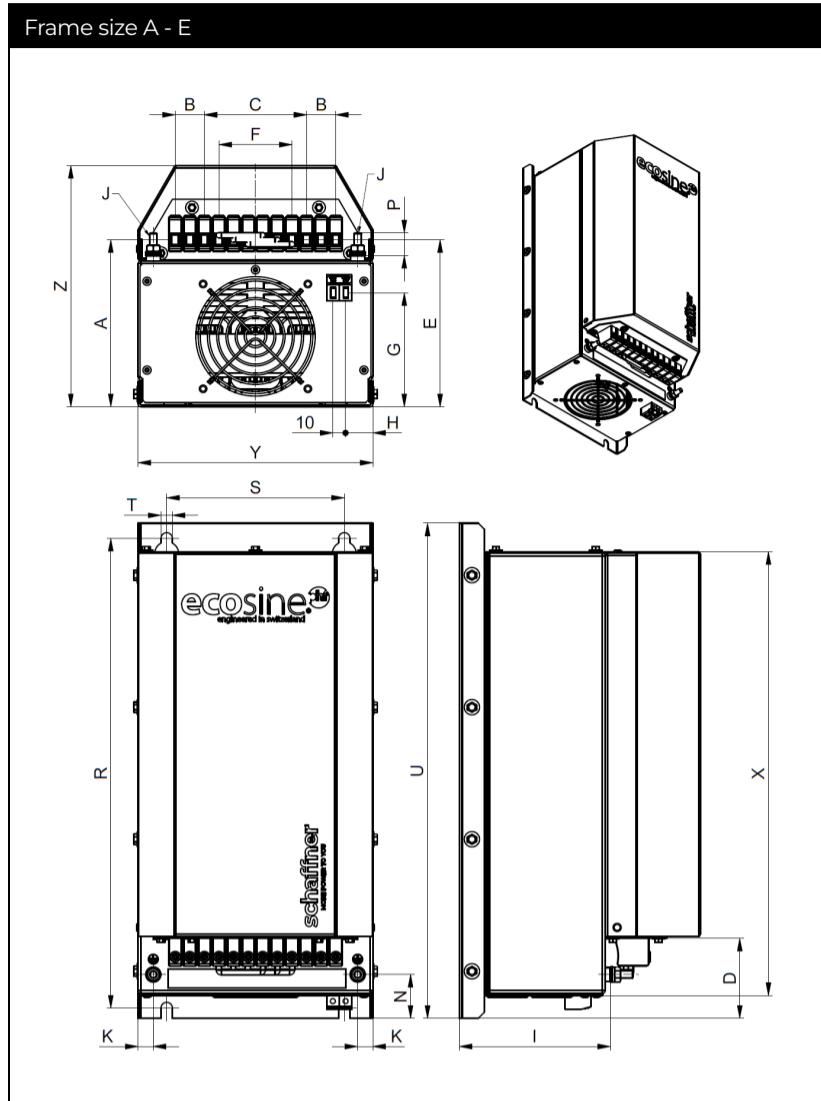

Dimensions

Frame size	A	B	C	D	E	F	G	H	I	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	Z
A	132	23	81	63	132	58	90	22	119	12			35	18		370	140	9	390			350	185	190
B	161	24	82	68	161	58	165	49	146	15			39	21		435	200	11	455			403	250	230
C	176	38	89	78	179	58	188	43	154	15			40	21		500	225	11	520			468	280	248
D	178	42	98	93	165	64	198	115	156	15			44	23		555	225	11	580			523	280	248
E	247	56	151	105	257	103	273	74	223	15			50	23		665	350	13	700			633	450	385
F	255	110	70	125	313	140	325	97	223	25	79	13	50	23	11	665	350	13	700	25	6	633	450	385
G	255	110	70	125	326	140	325	97	223	25	79	13	50	23	11	665	350	13	700	25	6	633	450	498

All dimensions in mm; 1 inch = 25.4 mm
 Tolerances according to: ISO 2768-m/EN 22768-m

Installation

For more detailed information and step by step installation guidelines, please consult the user manual at www.schaffner.com.

Headquarters, Global Innovation and Development

Switzerland

Schaffner Group

Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

Sales and Application Centers

Switzerland

Schaffner EMV AG

Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

China

Schaffner EMC Ltd. Shanghai

Building C
T20-3 C No 565 Chuangye Road Pudong district
C 幢 上海市浦东新区创业路 565 号 T20-3
201201
Shanghai
+ 86 21 38 139 500
cschina@schaffner.com

Singapore

Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

To find your local partner within Schaffner's global network schaffner.com

© 2023 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.