



Ecosine Evo, 480 VAC 50 Hz Full Performance Passive Harmonic Filters

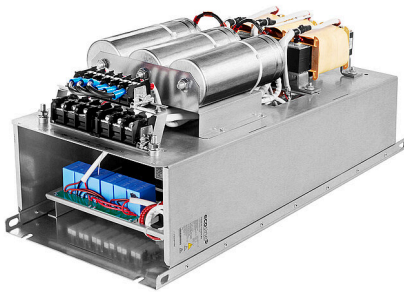

- The industry standard for 6-pulse rectifier and motor drives
- Filters for diode rectifier with or without DC-link choke and thyristor rectifier
- Best-in-class partial load performance
- Most compact design
- Plug and play, ready to use



Approvals & Compliances



(depending on filter configuration)


Features and Benefits

Schaffner ecosine harmonic filters represent an economical solution to the challenge of load-applied harmonics mitigation in three-phase power systems. With a plug-and-play approach and more compact dimensions than comparable products, they can be quickly installed and easily commissioned. They increase the reliability and service life of electric installations, help utilize electric system capacity better, and are the key to meet Power Quality standards such as IEEE 519. Ecosine filters reshape your distorted current back to the desired sinusoidal waveform. Schaffner ecosine filters can be applied to virtually any kind of power electronics with front-end six-pulse rectifiers, 3-phase diode or thyristor bridges, where harmonic current distortion needs to be reduced to defined limits.

Typical Applications

- Equipment with front-end six-pulse rectifier
- Motor drives
- Factory automation equipment
- Water/wastewater treatment facilities
- Fan and pump applications
- HVAC installations
- Mission-critical processes
- DC fast chargers

Typical electrical schematic

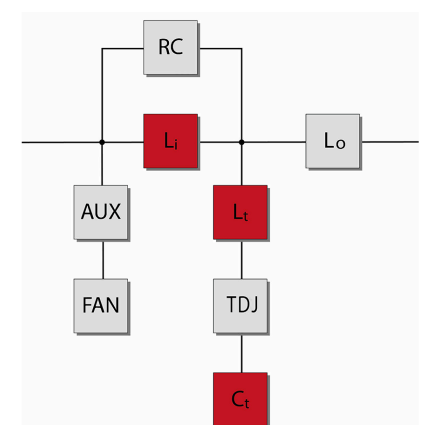

Technical Specifications

Nominal operating voltage	3x440 VAC to 500 VAC ±10%
Overload capability	1.6x rated current for 1 minute, once per hour
Operating frequency	50 Hz ±1 Hz
Total harmonic current distortion THDi*	<5% at rated power
Total demand distortion TDD	According to IEEE 519
Nominal motor drive input power rating	1.1 to 315 kW
High potential test voltage	P → E 2160 VAC (1 s)
Earthing system	TN, TT, IT
Efficiency	>98% for rated voltage and power
Overvoltage category	OV III (IEC 60664-1 / UL 61800-5-1)
Temperature range (operation and storage)	-25°C to +45°C fully operational +45°C to +70°C derated operation**** -25°C to +85°C transport and storage
Cooling	Internal fan cooling or external cooling***
Protection category	IP 00, IP 20
Flammability corresponding to	UL 94 V-2
Design corresponding to	Filter: UL 61800-5-1, EN 61800-5-1 Chokes: EN 61558-2-20 or EN 60076-6
SCCR**	100 kA
MTBF (Mil-HB-217F)	>200,000 h @ 45°C/480 V

- * System requirements: THDv <2%, line voltage unbalance <1%
Note: performance specifications in this brochure refer to six-pulse diode rectifiers.
SCR rectifier front-ends will produce different results, dependent upon the firing angle of the thyristors.
THDi ~5% at rated power for filter <6 kW/HP
- ** External UL-rated fuses required. Please consult the user manual.
- *** Please check the inlet air flow required for cooling table further in this document and the user manual.
- **** $I_{derated} = I_{nominal} * \sqrt{(T_{max} - T_{amb}) / (T_{max} - T_{nominal})} = I_{nominal} * \sqrt{(70^{\circ}\text{C} - T_{amb}) / 25^{\circ}\text{C}}$

Filter Selection Table – IP 00 Enclosure

Filter	Rated load power @ 480 VAC/50 Hz [kW]	Motor drive input current [Arms]**	Rated filter input current [Arms]	Weight [kg]	Typical losses [W]****	Terminal	Frame size
FN 3450-1-110-E0_ _ _ _ *	1.1	1.5	1.35	6	49	110	A
FN 3450-2-110-E0_ _ _ _ *	2.2	3.0	2.75	8	76	110	A
FN 3450-4-112-E0_ _ _ _ *	4.0	5.5	4.99	11	132	112	B
FN 3450-6-112-E0_ _ _ _ *	5.5	10	6.77	14	135	112	B
FN 3450-8-112-E0_ _ _ _ *	7.5	13	9.24	17	183	112	C
FN 3450-11-112-E0_ _ _ _ *	11	16	13.6	21	256	112	C
FN 3450-15-113-E0_ _ _ _	15	24	18.5	28	287	113	D
FN 3450-19-113-E0_ _ _ _	19	32	23.3	32	376	113	D
FN 3450-22-113-E0_ _ _ _	22	38	27.0	36	374	113	D
FN 3450-30-115-E0_ _ _ _	30	45	36.9	48	460	115	E
FN 3450-37-115-E0_ _ _ _	37	60	45.4	54	546	115	E
FN 3450-45-115-E0_ _ _ _	45	75	55.2	63	598	115	E
FN 3450-55-115-E0_ _ _ _	55	90	67.5	67	784	115	F
FN 3450-75-115-E0_ _ _ _	75	110	92.5	88	1036	115	F
FN 3450-90-116-E0_ _ _ _	90	150	111	120	1016	116	G
FN 3450-110-116-E0_ _ _ _	110	180	135	141	1083	116	G
FN 3450-132-118-E0_ _ _ _	132	210	163	161	1440	118	H
FN 3450-160-118-E0_ _ _ _ **	160	260	198	181	1412	118	H
FN 3450-200-118-E0_ _ _ _ **	200	320	248	217	1597	118	H
FN 3450-250-118-E0_ _ _ _ **	250	400	310	244	1745	118	H
FN 3450-315-119-E0XSXX	315	425	392	331	2025	119	J

* Filter rating which does not require forced cooling or fan module
** Filter rating which does not require RC damping module for rectifiers with EMI filter
*** Motor drive input current without harmonic filter
**** Typical losses @ 45°C, 480V, 50Hz and rated load power

Filter Power Terminals

Terminal designation*	Screw thread	Stranded wire AWG	Stranded wire [mm2]	Screw torque [Nm]	Max width** cable lug [mm]	Frame size
110	M3	14-22	0.4-2.5	0.5	7	A
112	M4	10-22	0.4-6	1.2	10	B, C
113	M6	6-18	0.75-16	3	15	D
115	M8	1/0-8	10-50	8	15	E, F
116	M8	3/0-8	10-95	8	17	G
118	M10	3/0-500 kcmil	95-240	10	35	H
119	M16	350-750 kcmil	185-400	10	48	J

* Recommended connector type: wire or cable lug for 110 to 113, only cable lug for 115 to 119
** To fulfill creepage/clearance acc. UL 61800-5-1 without additional protection (insulation). Creepage/clearance can vary depending on applicable standard and must be reviewed by customer. Creepage/clearance may be reduced when additional protection (insulation) is provided.

Filter Signal And Earth Terminals

Terminal type	Screw thread	Screw torque [Nm]	Frame size
Signal	M3*	0.5	All
Earth (PE)	M5	2.2	A
Earth (PE)	M6	4	B, C
Earth (PE)	M8	9	D, E
Earth (PE)	M10	17	F, G, H
Earth (PE)	M12	25	J

* Max width cable lug = 7 mm

Filter Selection Table – IP 20 Enclosure

Filter	Rated load power @ 480 VAC/50 Hz [kW]	Motor drive input current [Arms]***	Rated filter input current [Arms]	Weight [kg]	Typical losses [W]****	Terminal	Frame size
FN 3450-1-110-E2_ _ _ _ *	1.1	1.5	1.35	7	49	110	A
FN 3450-2-110-E2_ _ _ _ *	2.2	3.0	2.75	9	76	110	A
FN 3450-4-112-E2_ _ _ _ *	4.0	5.5	4.99	13	132	112	B
FN 3450-6-112-E2_ _ _ _ *	5.5	10	6.77	15	135	112	B
FN 3450-8-112-E2_ _ _ _ *	7.5	13	9.24	19	183	112	C
FN 3450-11-112-E2_ _ _ _ *	11	16	13.6	23	256	112	C
FN 3450-15-113-E2_ _ _ _ _	15	24	18.5	32	287	113	D
FN 3450-19-113-E2_ _ _ _ _	19	32	23.3	36	376	113	D
FN 3450-22-113-E2_ _ _ _ _	22	38	27.0	40	374	113	D
FN 3450-30-115-E2_ _ _ _ _	30	45	36.9	53	460	115	E
FN 3450-37-115-E2_ _ _ _ _	37	60	45.4	60	546	115	E
FN 3450-45-115-E2_ _ _ _ _	45	75	55.2	69	598	115	E
FN 3450-55-115-E2_ _ _ _ _	55	90	67.5	74	784	115	F
FN 3450-75-115-E2_ _ _ _ _	75	110	92.5	95	1036	115	F
FN 3450-90-116-E2_ _ _ _ _	90	150	111	129	1016	116	G
FN 3450-110-116-E2_ _ _ _ _	110	180	135	149	1083	116	G
FN 3450-132-118-E2_ _ _ _ _	132	210	163	178	1440	118	H
FN 3450-160-118-E2_ _ _ _ **	160	260	198	198	1412	118	H
FN 3450-200-118-E2_ _ _ _ **	200	320	248	234	1597	118	H
FN 3450-250-118-E2_ _ _ _ **	250	400	310	261	1745	118	H
FN 3450-315-119-E2FASXX	315	425	392	357	2025	119	J

* Filter rating which does not require forced cooling or fan module
** Filter rating which does not require RC damping module for rectifiers with EMI filter
*** Motor drive input current without harmonic filter
**** Typical losses @ 45°C, 480V, 50Hz and rated load power

Filter Power Terminals

Terminal designation*	Screw thread	Stranded wire AWG	Stranded wire [mm2]	Screw torque [Nm]	Max width** cable lug [mm]	Frame size
110	M3	14-22	0.4-2.5	0.5	7	A
112	M4	10-22	0.4-6	1.2	10	B, C
113	M6	6-18	0.75-16	3	15	D
115	M8	1/0-8	10-50	8	15	E, F
116	M8	3/0-8	10-95	8	17	G
118	M10	3/0-500 kcmil	95-240	10	35	H
119	M16	350-750 kcmil	185-400	10	48	J

* Recommended connector type: wire or cable lug for 110 to 113, only cable lug for 115 to 119
** To fulfill creepage/clearance acc. UL 61800-5-1 without additional protection (insulation). Creepage/clearance can vary depending on applicable standard and must be reviewed by customer. Creepage/clearance may be reduced when additional protection (insulation) is provided.

Filter Signal And Earth Terminals

Terminal type	Screw thread	Screw torque [Nm]	Frame size
Signal	M3*	0.5	All
Earth (PE)	M5	2.2	A
Earth (PE)	M6	4	B, C
Earth (PE)	M8	9	D, E
Earth (PE)	M10	17	F, G, H
Earth (PE)	M12	25	J

* Max width cable lug = 7 mm

Product selector

FN 34nn-xxx-yyy-

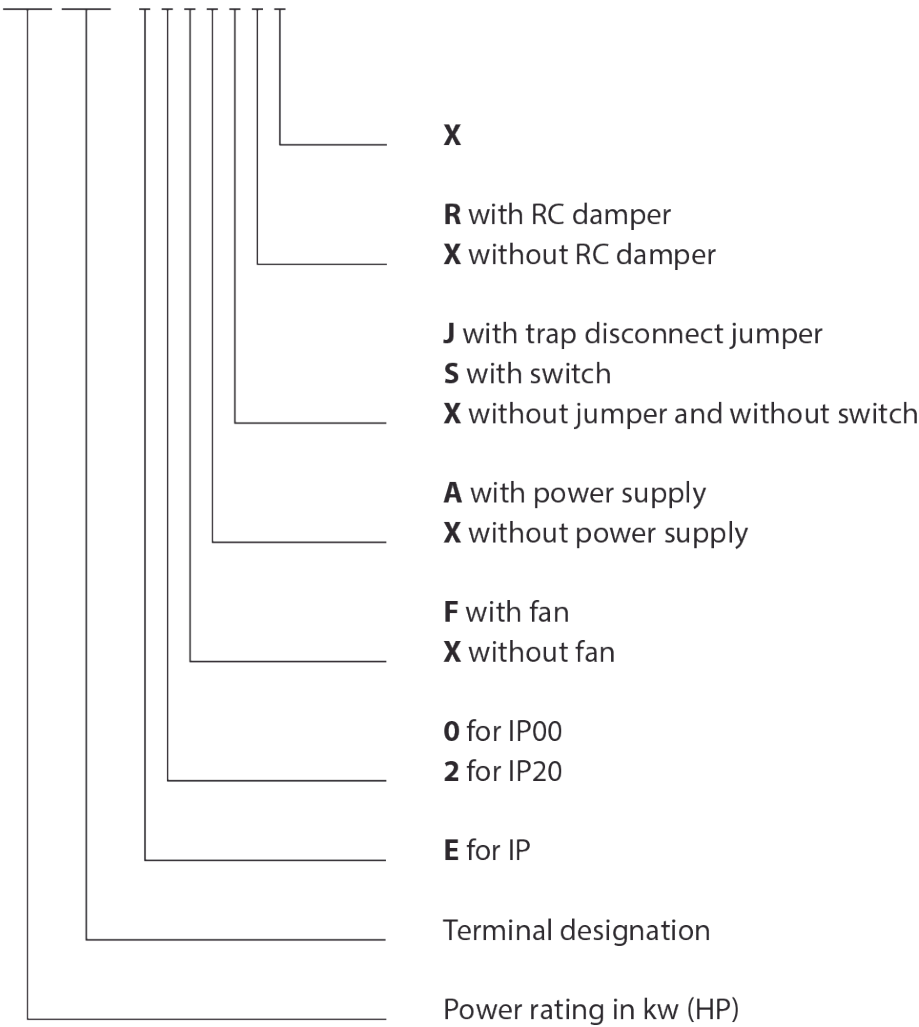


Table 1: Filter Configurations If External Air Flow Is Available For Cooling

(Filters do **not** contain fan and do **not** contain aux. power supply)

E0XXXXX	E0XXJXX	E0XXXXRX	E0XXJRX
- For rectifiers without DC-link choke	- For rectifiers without DC-link choke	- For rectifiers without DC-link choke and with EMI filter	- For rectifiers without DC-link choke and with EMI filter
	- Filters contain trap disconnect jumper	- Filters contain RC damper module	- Contain RC damper module and trap disconnect jumper

Table 2: Filter Configurations With Embedded Ventilation

(Filters **contain fan** and **aux. power supply**)

E0FAXXX and E2FAXXX - For rectifiers without DC-link choke - Filters contain fan, aux. power supply	E0FAJXX and E2FAJXX - For rectifiers without DC-link choke - Filters contain fan, aux. power supply and trap disconnect jumper	E0FAXRX and E2FAXRX - For rectifiers without DC-link choke and with EMI filter - Filters contain fan, aux. power supply and RC damper module	E0FAJRX and E2FAJRX - For rectifiers without DC-link choke and with EMI filter - Filters contain fan, aux. power supply, RC damper module and trap disconnect jumper
--	---	---	---

Table 3: Filter Configurations If External Aux. Power Supply For The Fan Is Available




(Filters **contain fan** but do **not contain aux. power supply**, user should provide aux. power supply to the fan)

E0FXXXX and E2FXXXX - For rectifiers without DC-link choke - Filters contain fan	E0FXJXX and E2FXJXX - For rectifiers without DC-link choke - Filters contain fan and trap disconnect jumper	E0FXXRX and E2FXXRX - For rectifiers without DC-link choke and with EMI filter - Filters contain fan and RC damper module	E0FXJRX and E2FXJRX - For rectifiers without DC-link choke and with EMI filter - Contain fan, RC damper module and trap disconnect jumper
---	--	--	--

Table 4: 250 KW Filter Configuration

E0XSXX - For rectifiers without DC-link choke - Filters contain circuit breaker	E2FASXX - For rectifiers without DC-link choke - Filters contain fan aux. power supply and circuit breaker
--	---

Mechanical Data Of IP 00 Enclosure

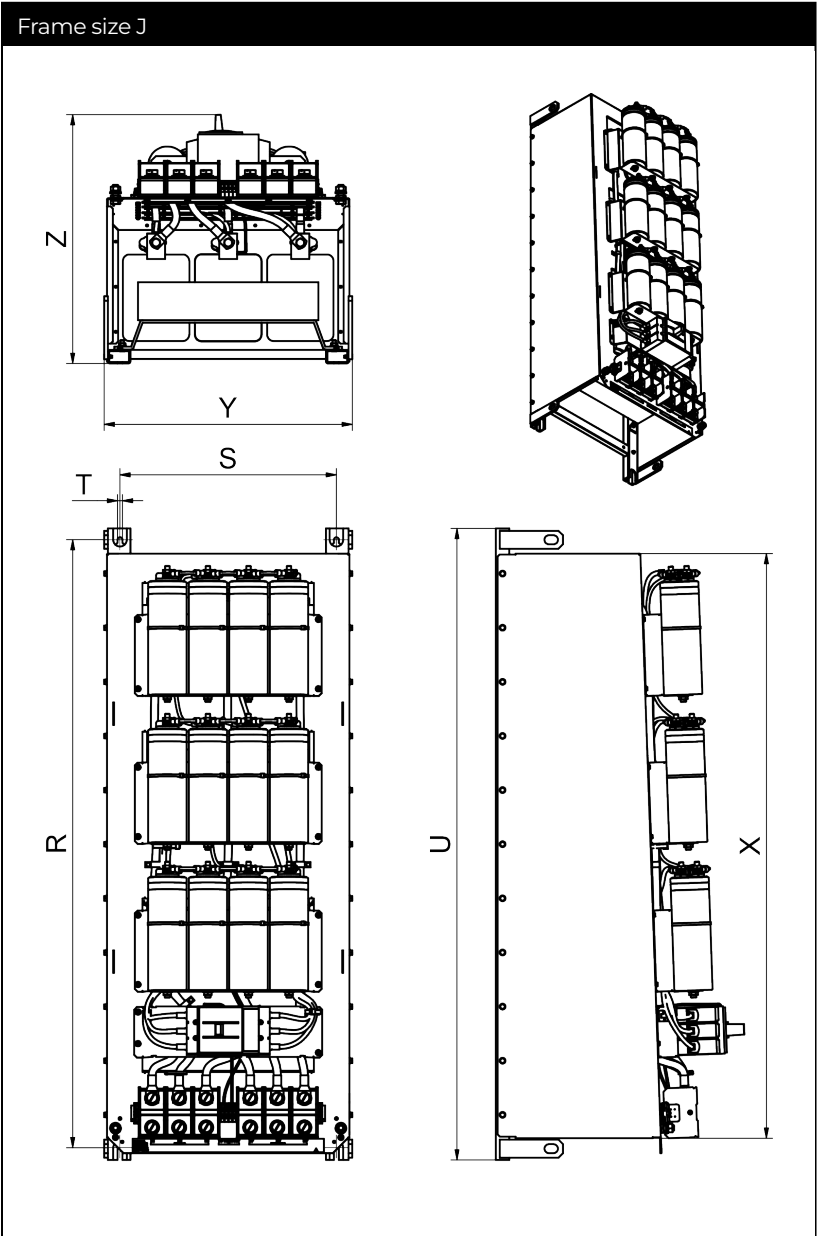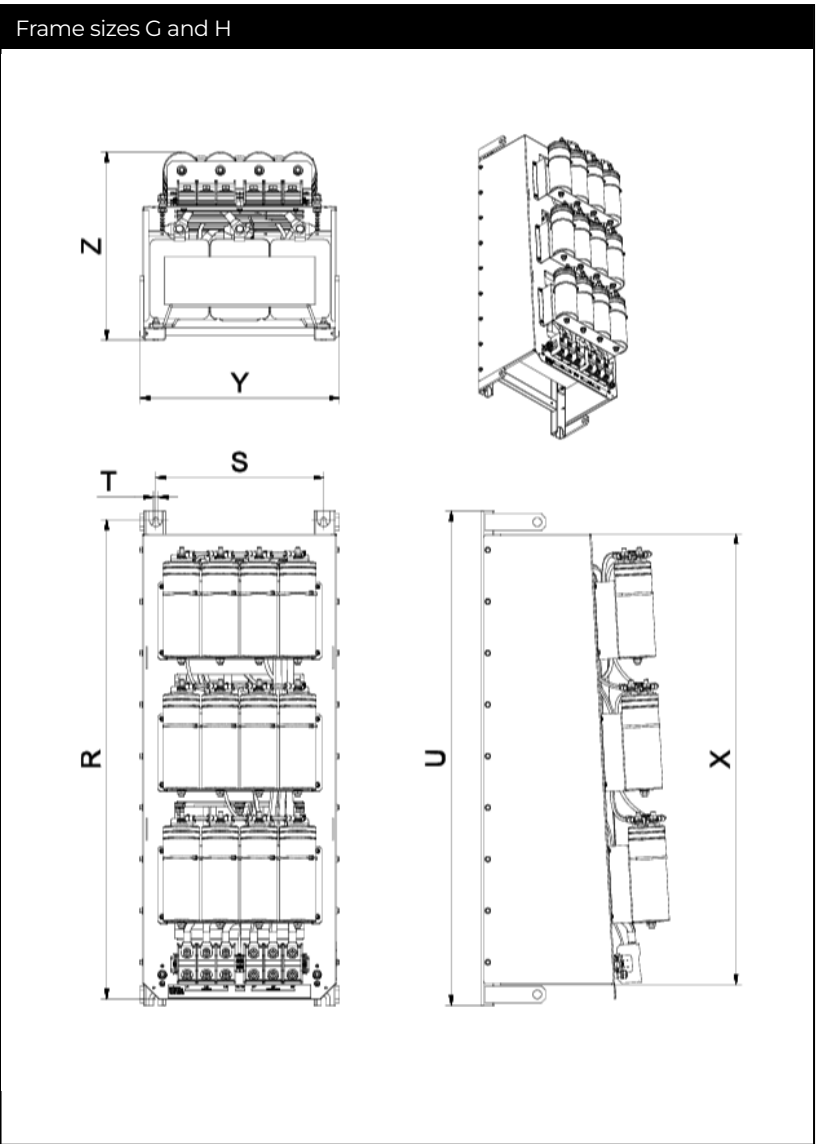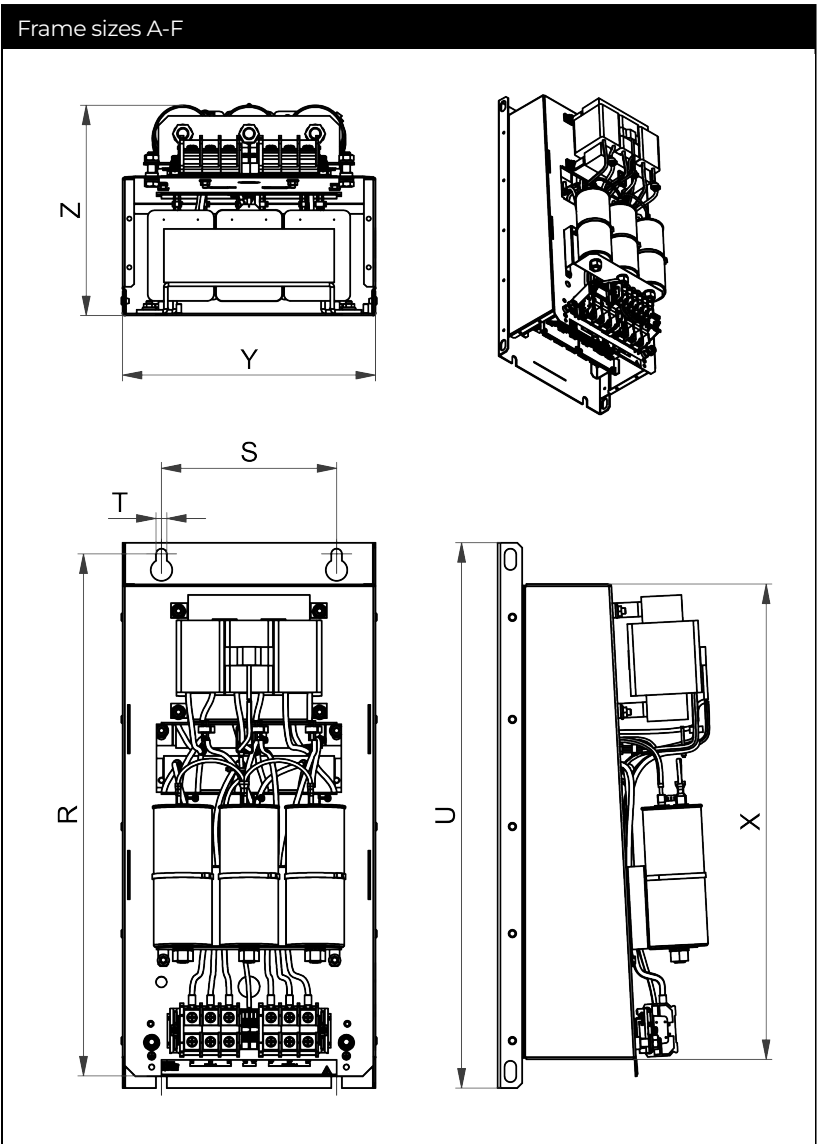

Dimensions




Frame			Drill pattern	Base				Volume
			[mm]	[mm]				[mm]
	R	S	T	U	X	Y	Z	
A	340	120	7	360	302	160	185	
B	405	120	7	425	370	180	206	
C	460	150	7	483	430	210	221	
D	540	180	11	560	491	260	252	
E	680	220	11	705	635	290	319	
F	730	250	11	752	684	340	343	
G	920	280	11	960	863	353	386	
H	1115	390	11	1150	1053	462	456	
J	1348	480	11	1400	1300	550	555	

Inlet Air Flow Required For Cooling

Frame size	Min air volume* [m3/h]
A, B, C	0
D	128
E	204
G	408
H	612
J	816

* External air flow required for filter configurations without embedded ventilation

Mechanical Data Of IP 20 Enclosure

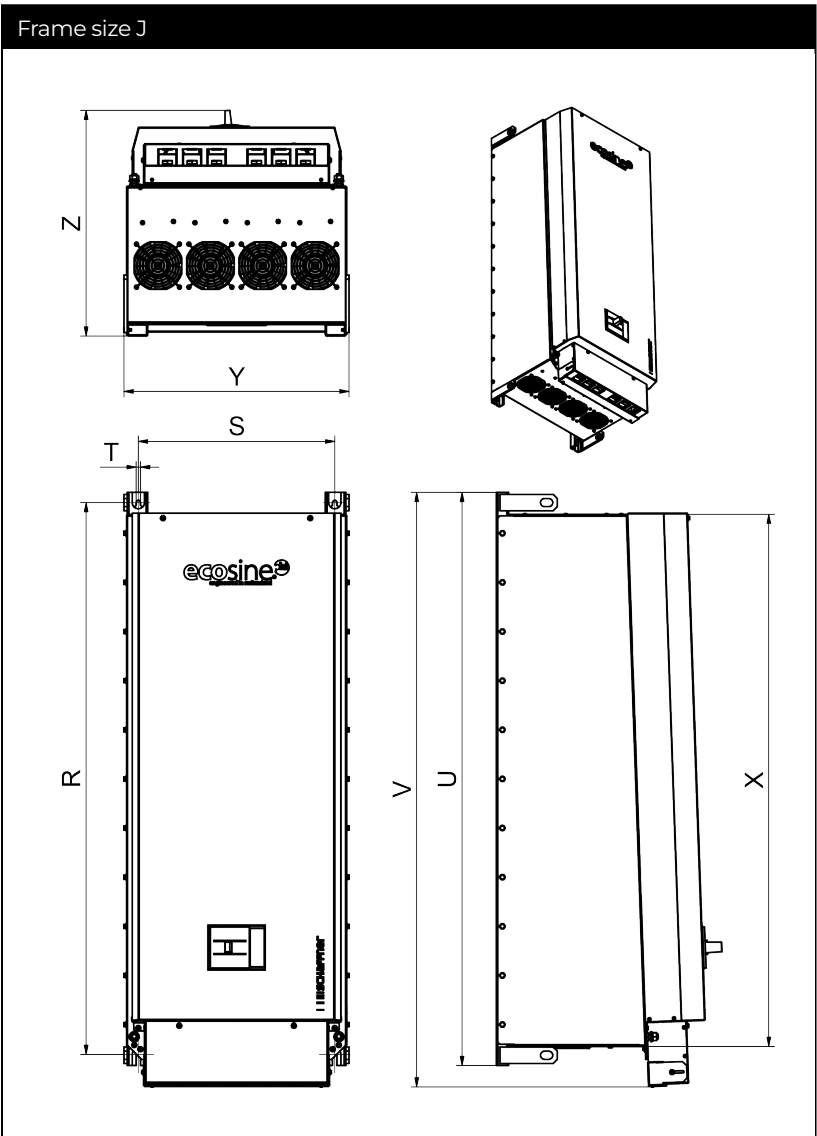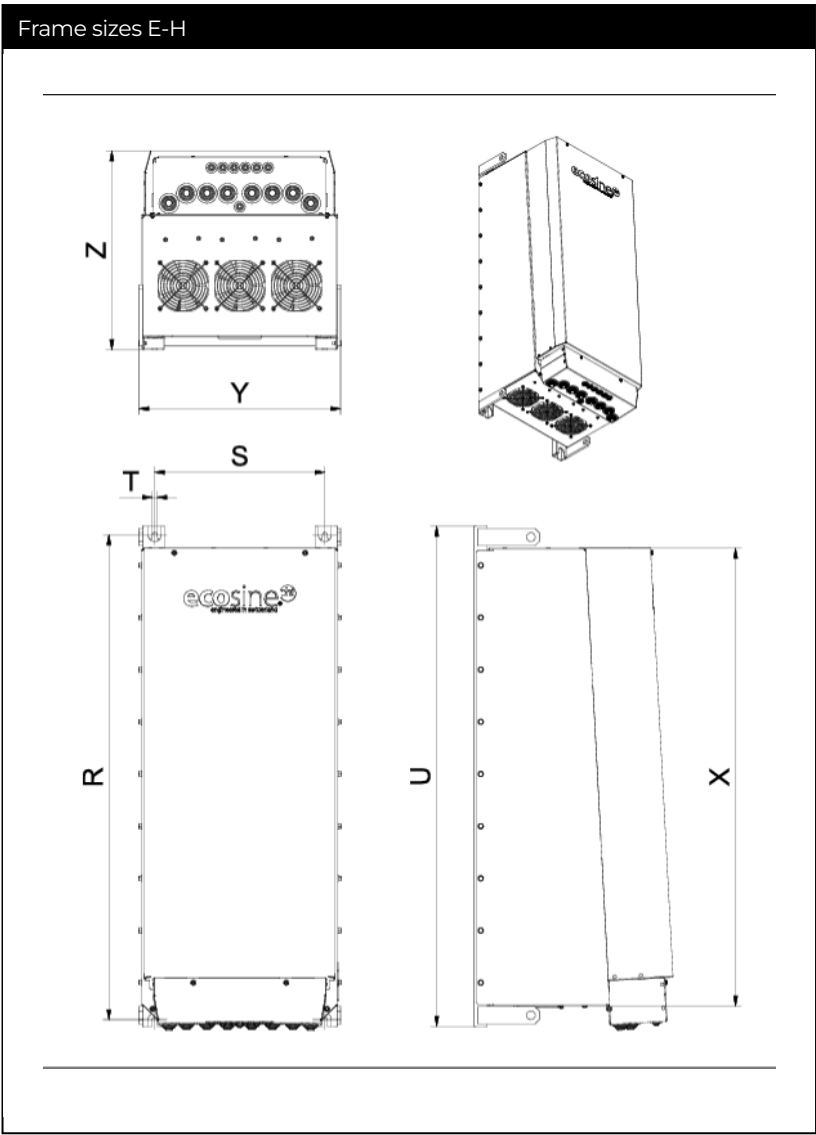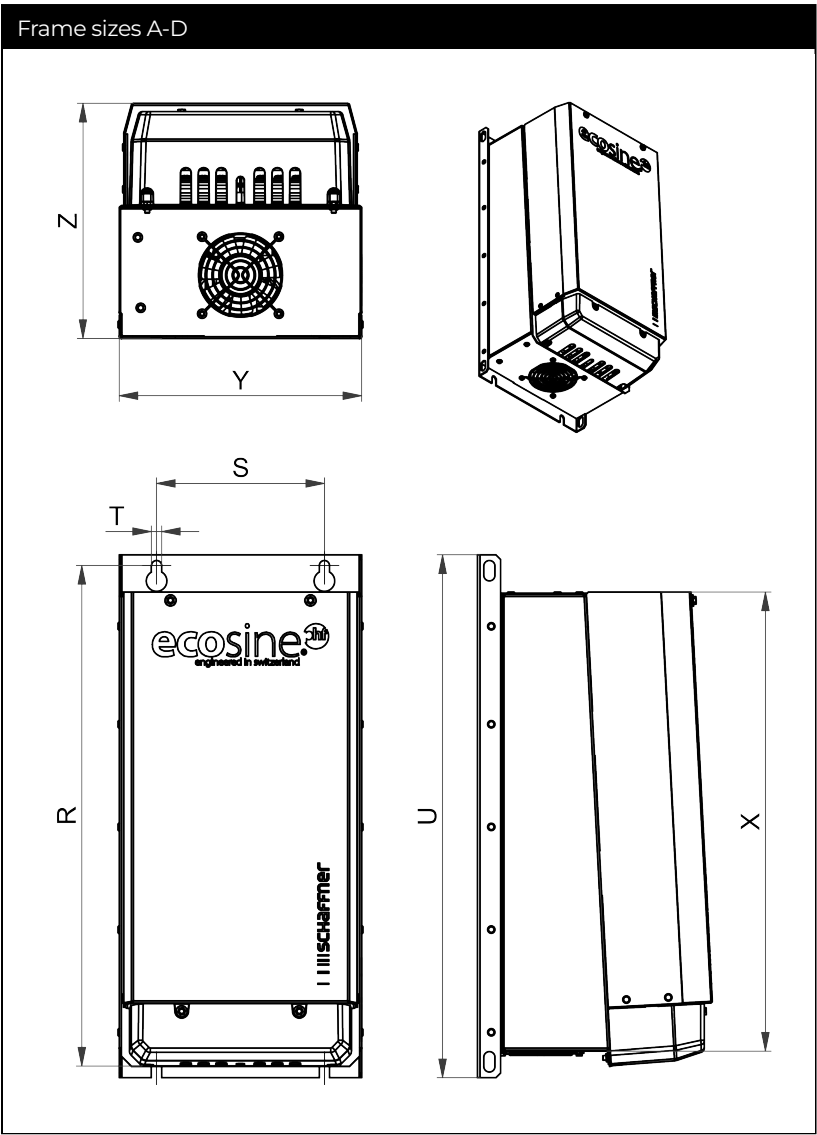

Dimensions

Frame			Drill pattern	Base	Volume			
			[mm]	[mm]	[mm]			
	R	S	T	U	X	Y	Z	V
A	340	120	7	360	302	160	185	
B	405	120	7	425	370	180	206	
C	460	150	7	483	430	210	221	
D	540	180	11	560	491	260	252	
E	680	220	11	705	635	290	319	
F	730	250	11	752	684	340	343	
G	920	280	11	960	863	353	386	
H	1115	390	11	1150	1053	462	456	
J	1348	480	11	1400	1300	550	555	1455

Inlet Air Flow Required For Cooling

Frame size	Min air volume* [m3/h]
A, B, C	0
D	128
E	204
G	408
H	612
J	816

* External air flow required for filter configurations without embedded ventilation

Headquarters, Global Innovation and Development

Switzerland
Schaffner Group
Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

Sales and Application Centers

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

China
Beijing Jingzhe Electronics Co.,Ltd.
Room 307, Building A, Jiahua Building, No.9
Shangdi 3rd Street, Haidian District
Beijing Yiting Ying
China
+86 13810880767
yingyiting@bjjingzhe.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

To find your local partner within Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.