

Ecosine Max, 480 VAC 50 Hz Full Performance Passive Harmonic Filters

- Demonstrate best cost-performance ratio
- Achieve 5% THDi for diode rectifier without DC-link choke and thyristor rectifier
- Best-in-class partial load performance
- Most compact open panel design for cabinet integration
- Reliable and robust
- Plug and play, ready to use



Approvals & Compliances



Features and Benefits

Schaffner ecosine harmonic filters represent an economical solution to the challenge of load-applied harmonics mitigation in three-phase power systems. With a plug-and-play approach and more compact dimensions than comparable products, they can be quickly installed and easily commissioned. They increase the reliability and service life of electric installations, help utilize electric system capacity better, and are the key to meet Power Quality standards such as IEEE 519. Ecosine filters reshape your distorted current back to the desired sinusoidal waveform. Schaffner ecosine filters can be applied to virtually any kind of power electronics with front-end six-pulse rectifiers, 3-phase diode or thyristor bridges, where harmonic current distortion needs to be reduced to defined limits.

Typical Applications


- Equipment with front-end six-pulse rectifier
- Motor drives
- Factory automation equipment
- Water/wastewater treatment facilities
- Fan and pump applications
- HVAC installations
- Mission-critical processes
- DC fast chargers

Technical Specifications

| | |
|--|--|
| Nominal operating voltage | 3x440 VAC to 480 VAC ±10% |
| Overload capability | 1.6x rated current for 1 minute, once per hour |
| Operating frequency | 50 Hz ±1 Hz |
| Total harmonic current distortion THDi* | <5% @ rated power for drives without Ldc ~3.5% @ rated power for drives equipped with 4% Ldc |
| Total demand distortion TDD | According to IEEE 519 |
| Nominal motor drive input power rating | 315 to 560 kW |
| High potential test voltage | P -> E 2520 VAC (1s) |
| Earthing system | TN, TT, IT |
| Efficiency | >99% for rated voltage and power |
| Overvoltage category | OV III (IEC 60664-1) |
| Temperature range (operation and storage) | -25°C to +40°C fully operational +40°C to +70°C derated operation**** -25°C to +85°C transport and storage |
| Cooling | External cooling*** |
| Protection category | IP 00 |
| Flammability corresponding to | UL 94 V-2 |
| Design corresponding to | Filter: UL 61800-5-1, EN 61800-5-1 Chokes: EN 60076-6 |
| SCCR** | 100 kA (UL approved) |
| MTBF (Mil-HB-217F) | >200,000 h @ 40°C/480 V |

* System requirements: THDv <2%, line voltage unbalance <1%
Note: performance specifications in this brochure refer to six-pulse diode rectifiers. SCR rectifier front-ends will produce different results, dependent upon the firing angle of the thyristors.
** External UL-rated fuses required. Please consult the user manual.
*** Please check the inlet air flow required for cooling table further in this document and the user manual.
**** Iderated = $Inominal \cdot \sqrt{\frac{T_{max} - T_{amb}}{T_{max} - T_{nominal}}}$ = $Inominal \cdot \sqrt{\frac{70^\circ\text{C} - T_{amb}}{30^\circ\text{C}}}$

Typical electrical schematic

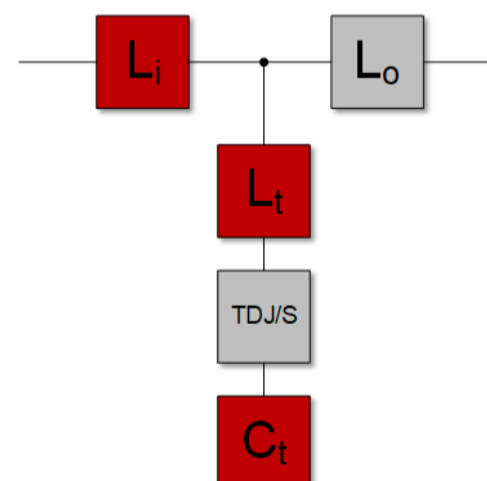

Filter Selection Table With Circuit Breaker Module

| Filter | Rated load power @ 480 V/50 Hz [kW] | Motor drive input current* [Arms] | Rated filter input current [Arms] | Typical power losses @ 40°C [W] | Circuit breaker rated current [A] | Weight [kg] | Terminal | Frame size |
|------------------------|---|---|---|------------------------------------|---|----------------|----------|---------------|
| FN 3480-315-99-E0XXSXX | 315 | 565 | 393 | 3278 | 250 | 270 | Busbar | S10 |
| FN 3480-355-99-E0XXSXX | 355 | 630 | 442 | 3343 | 250 | 328 | Busbar | S10 |
| FN 3480-400-99-E0XXSXX | 400 | 701 | 499 | 3584 | 300 | 366 | Busbar | S12 |
| FN 3480-500-99-E0XXSXX | 500 | 856 | 629 | 4356 | 400 | 385 | Busbar | L10 |
| FN 3480-560-99-E0XXSXX | 560 | 947 | 705 | 4536 | 400 | 410 | Busbar | L12 |

* Motor drive input current without harmonic filter.

Filter Selection Table With Trap Disconnect Jumper


| Filter | Rated load power @ 480 V/50 Hz [kW] | Motor drive input current* [Arms] | Rated filter input current [Arms] | Typical power losses @ 40°C [W] | Weight [kg] | Terminal | Frame size |
|------------------------|---|---|---|------------------------------------|----------------|----------|---------------|
| FN 3480-315-99-E0XXJXX | 315 | 565 | 394 | 3278 | 270 | Busbar | S10 |
| FN 3480-355-99-E0XXJXX | 355 | 630 | 442 | 3343 | 328 | Busbar | S10 |
| FN 3480-400-99-E0XXJXX | 400 | 701 | 499 | 3584 | 366 | Busbar | S12 |
| FN 3480-500-99-E0XXJXX | 500 | 856 | 629 | 4356 | 385 | Busbar | L10 |
| FN 3480-560-99-E0XXJXX | 560 | 947 | 705 | 4536 | 410 | Busbar | L12 |

* Motor drive input current without harmonic filter.

Earth Terminals


| Earth (PE) | Screw thread | Screw torque [Nm] |
|------------|--------------|----------------------|
| S08-L12 | M12 | 20-25 |

Frame Size Designation

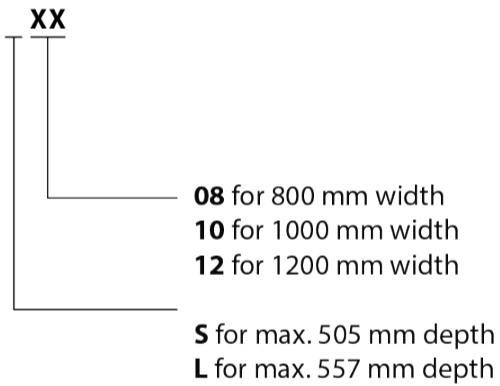

Product selector



FN 34nn-xxx-yyy-

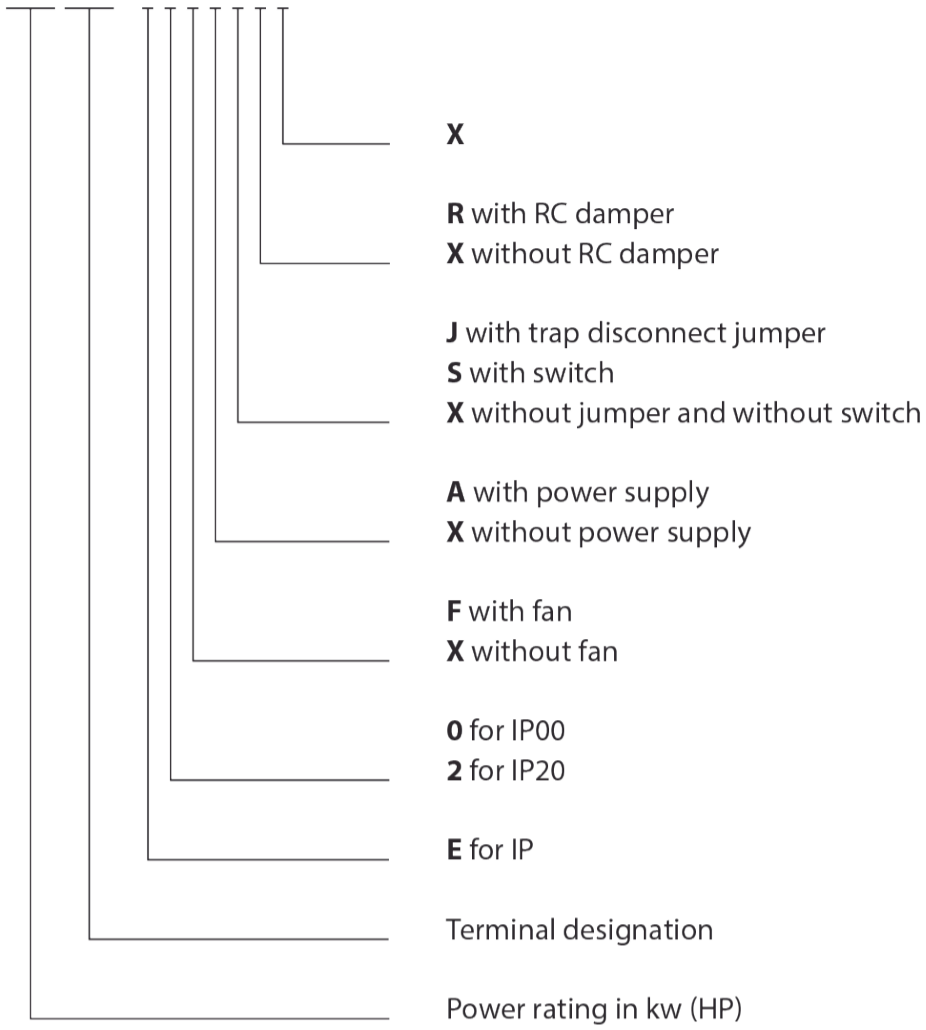

Filter Configurations

E0XXSXX


E0XXJXX



- For rectifiers without DC-link choke
- Filters contain trap disconnect switch

- For rectifiers without DC-link choke
- Filters contain trap disconnect jumper

Mechanical Data Of IP 00 Enclosure

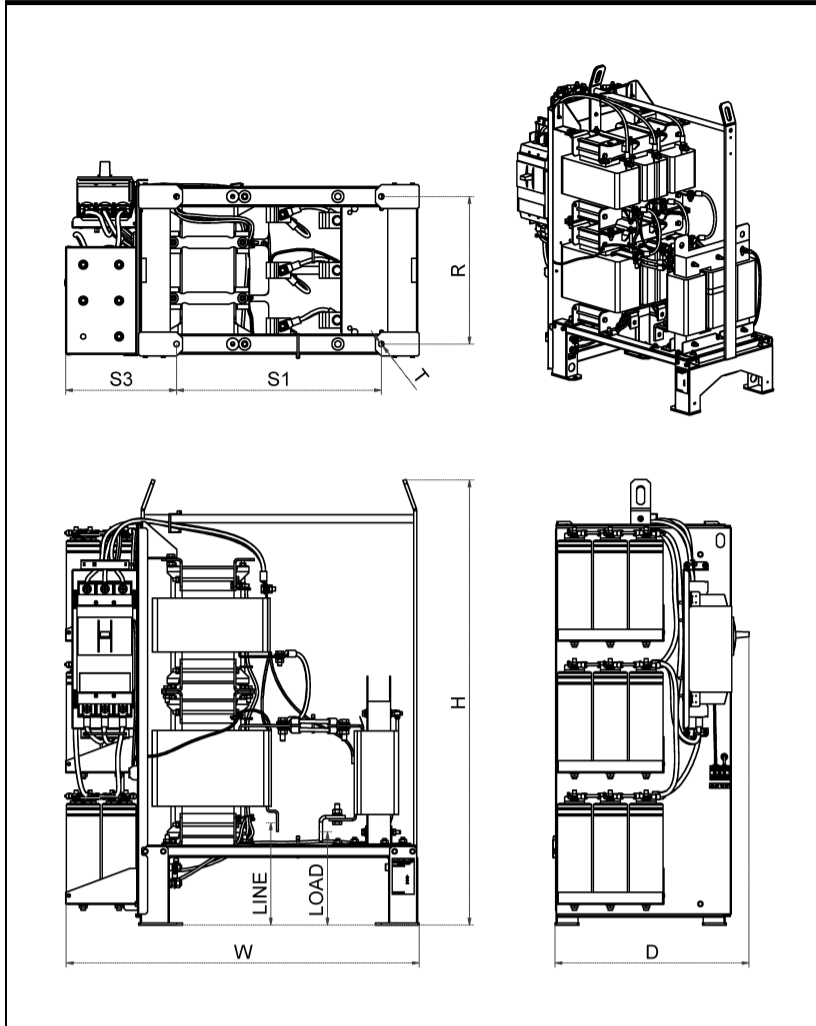

Dimensions

| Frame size* | W | D | H | R | S1 | S2 | S3 | T | LINE | LOAD | Recommended cabinet size WxDxH |
|-------------|----------|----------|------|-----|-----|-----|-----|------|----------|----------|--------------------------------|
| S08 | max. 650 | max. 505 | 1120 | 380 | 330 | 230 | 490 | 13.5 | 255 ± 10 | 470 ± 30 | 800x600x2000 |
| S10 | 890 | max. 505 | 1120 | 370 | 514 | n/a | 280 | 13.5 | 255 ± 10 | 240 ± 30 | 1000x600x2000 |
| S12 | 1060 | max. 505 | 1120 | 370 | 684 | n/a | 280 | 13.5 | 255 ± 10 | 230 ± 10 | 1200x600x2000 |
| L08 | max. 680 | 557 | 1320 | 458 | 320 | 225 | 485 | 13.5 | 290 ± 10 | 540 ± 30 | 800x600x2000 |
| L10 | 890 | max. 557 | 1320 | 455 | 504 | n/a | 285 | 13.5 | 290 ± 10 | 230 ± 10 | 1000x600x2000 |
| L12 | 1060 | max. 557 | 1320 | 455 | 674 | n/a | 285 | 13.5 | 290 ± 10 | 220 ± 10 | 1200x600x2000 |

* General tolerance: ISO 2768-v
All dimensions (and tolerance) are in mm.

Inlet Air Flow Required For Cooling

| Frame size | Min air volume* [m ³ /h] |
|------------|--|
| S08, L08 | 1069 |
| S10, L10 | 1069 |
| S12, L12 | 1069 |

Headquarters, Global Innovation and Development

Switzerland

Schaffner Group

Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

Sales and Application Centers

Switzerland

Schaffner EMV AG

Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

China

Beijing Jingzhe Electronics Co.,Ltd.

Room 307, Building A, Jiahua Building, No.9
Shangdi 3rd Street, Haidian District
Beijing Yiting Ying
China
+86 13810880767
yingyiting@bjjingzhe.com

Singapore

Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

To find your local partner within
Schaffner's global network schaffner.com

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.