

# Single-phase EMC Filter for Control Equipment



- Filter for the control line of complex equipment and machinery
- To ensure interference-free operation of control equipment (PLC, Motion-, Robot Control etc.)
- To improve operational reliability and system stability
- Compact EMC filter design with minimum space requirement




### Performance indicators

Attenuation performance



Rated current [A]



## Technical specifications

<b>Maximum continuous operating voltage</b>	250 VAC
<b>Operating frequency</b>	DC to 400 Hz
<b>Rated currents</b>	6 to 16 A @ 50°C
<b>High potential test voltage</b>	P/N → E 2250VDC for 2 sec P → N 1100VDC for 2 sec
<b>Protection category</b>	IP 20
<b>Overload capability</b>	4x rated current at switch on, 1.5x rated current for 1 minute, once per hour
<b>Temperature range (operation and storage)</b>	-25°C to +100°C (25/100/21)
<b>Flammability corresponding to</b>	UL 94 V-2 or better
<b>Design corresponding to</b>	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
<b>MTBF @ 50°C/250 V (Mil-HB-217F)</b>	1,300,000 hours

### Approvals & Compliances



**ROHS**


### Features and benefits

- An additional filter for the supply cables of controls of rather large and complex systems, to ensure a reliable operation of the control unit.
- To achieve significant system stability improvement by reducing the risk of internal interference propagation and coupling.
- FN 2415 B version without leakage current (0 mA)
- FN 2415 L version with leakage current of less than 3.5 mA.
- Simple and time-saving installation with good accessibility for automatic and hand tools
- Solid, touch-safe terminal blocks offering sufficient contacting cross section according to the EN 60204-1 installation standard
- By providing a very decent attenuation performance, FN 2415 contributes significantly to the achievement of electromagnetic compliance, e.g. EN50370-1 standards for machine tools.

### Typical applications

Ideal for industrial equipment, machinery and diverse process automation systems, which involve any kind of control units (NC, CNC, Motion- and Robot Controls). Large and complex machine tools with multiple driving axes and very long motor cables can be subjected to major reliability problems, provoked and by internal coupling of interferences from the drive system to the control wires. This can cause drop outs and interrupts of the control unit and consequently lead to unnecessary downtimes of the entire machine. FN 2415 can also be used for most diverse single-phase applications, e.g. motor drives and power supplies.

### Typical electrical schematic

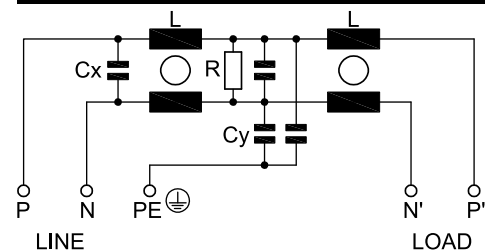

### Filter selection table

Filter	Buy	Rated current @40°C (25°C)	Leakage current*		Power loss	Inductance**		Capacitance**		Resistance** R	Input/Output	Weight
			250VAC/50Hz (120VAC/60Hz)			L	Cx	Cy				
		[A]	[mA]	[W]	[mH]***	[μF]	[nF]	[kΩ]			[kg]	
<b>FN2415-6-29</b>		6 (6.6)	7.85 (4.52)	2.2	8	3.3	100	220	-29		0.4	
<b>FN2415-10-29</b>		10 (11)	7.85 (4.52)	2.4	4.2	3.3	100	220	-29		0.4	
<b>FN2415-16-29</b>		16 (17.5)	7.85 (4.52)	4.3	3	3.3	100	220	-29		0.4	
<b>FN2415B-6-29</b>		6 (6.6)	0.00 (0.00)	2.2	8	3.3		220	-29		0.4	
<b>FN2415B-10-29</b>		10 (11)	0.00 (0.00)	2.4	4.2	3.3		220	-29		0.4	
<b>FN2415B-16-29</b>		16 (17.5)	0.00 (0.00)	4.3	3	3.3		220	-29		0.4	
<b>FN2415L-6-29</b>		6 (6.6)	2.59 (1.49)	2.2	8	3.3	33	220	-29		0.4	
<b>FN2415L-10-29</b>		10 (11)	2.59 (1.49)	2.4	4.2	3.3	33	220	-29		0.4	
<b>FN2415L-16-29</b>		16 (17.5)	2.59 (1.49)	4.3	3	3.3	33	220	-29		0.4	


\* Maximum leakage under normal operating conditions (acc. to IEC60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

\*\* Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%


\*\*\* Value of both inductors in the same

### Typical filter attenuation


Per CISPR 17; DM (differential mode)=50 Ω/50 Ω sym; CM (common mode)=50 Ω/50 Ω asym




6 A: Standard type

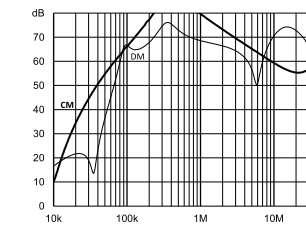


L type

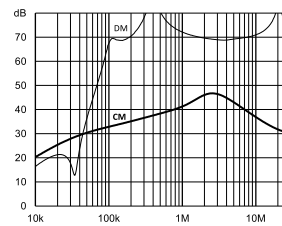


B type




10 A: Standard type

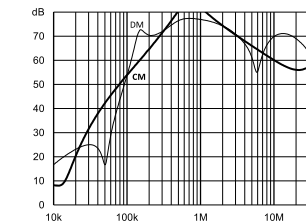


L type

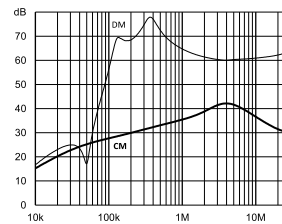


B type



16 A: Standard type

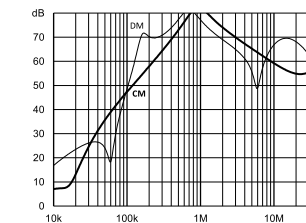


L type

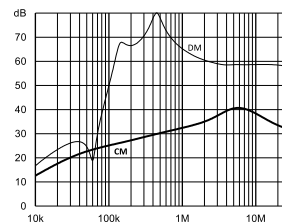

B type

## Mechanical Data

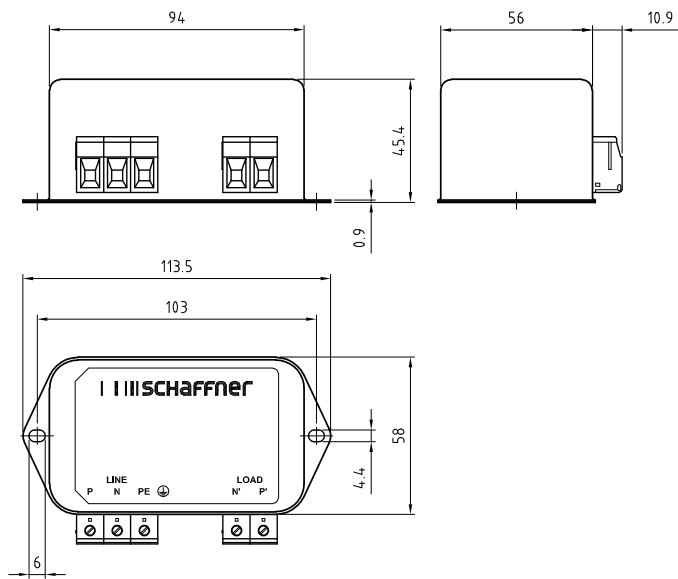

All dimensions in mm; 1 inch = 25.4 mm ; Tolerances according: ISO 2768-m/EN 22768-m

## Distribution inventory

Up-to-date inventory levels for global distributors is available at

<https://products.schaffner.com/stock>

or via the QR code printed on the right side

## Filter input/output connector cross sections

	-29
<b>Solid wire</b>	6 mm <sup>2</sup>
<b>Flex wire</b>	4 mm <sup>2</sup>
<b>AWG type wire</b>	AWG 10
<b>Recommended torque</b>	0.6-0.8 Nm

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.





## Headquarters, global innovation and development

### Switzerland

#### Schaffner Group

Industrie Nord  
Nordstrasse 11e  
4542 Luterbach  
T +41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

To find your local partner within Schaffner's global network: [www.schaffner.com](http://www.schaffner.com)

© 2018 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.



## Sales and application centers

### China

#### Schaffner EMC Ltd. Shanghai

T20-3 C, No 565 Chuangye Road,  
Pudong district  
201201 Shanghai  
T +86 21 3813 9500  
[cschina@schaffner.com](mailto:cschina@schaffner.com)  
[www.schaffner.com.cn](http://www.schaffner.com.cn)

### Finland

#### Schaffner Oy

Sauvonrinne 19 H  
08500 Lohja  
T +358 10 567 2855  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

### France

#### Schaffner EMC S.A.S.

16-20 Rue Louis Rameau  
95875 Bezons  
T +33 1 34 34 30 60  
F +33 1 39 47 02 28  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

### Germany

#### Schaffner Deutschland GmbH

Schoemperlenstrasse 12B  
76185 Karlsruhe  
T +49 721 56910  
F +49 721 569110  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

### India

#### Schaffner India Pvt. Ltd

REGUS WORLD TRADE CENTRE  
WTC, 22nd Floor Unit No 2238, Brigade  
Gateway Campus, 26/1, Dr. Rajkumar Road  
Malleshwaram (W)  
560055 Bangalore  
T +91 80 67935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

### Italy

#### Schaffner EMC S.r.l.

Via Ticino, 30  
20900 Monza (MB)  
T +39 039 21 41 070  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

### Japan

#### Schaffner EMC K.K.

Taiju-Seimei Sangenjaya Bldg.  
1-32-12, Kamiyama, Setagaya-ku  
154-0011 Tokyo  
T +81 3 5712 3650  
F +81 3 5712 3651  
[japansales@schaffner.com](mailto:japansales@schaffner.com)  
[www.schaffner.jp](http://www.schaffner.jp)

### Singapore

#### Schaffner EMC Pte Ltd.

#05-09, Kg Ubi Ind. Estate  
408705 Singapore  
T +65 6377 3283  
F +65 6377 3281  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

### Spain

#### Schaffner EMC España

Calle Caléndula 93, Miniparc III, Edificio E  
El Soto de Moraleja, Alcobendas  
28109 Madrid  
T +34 917 912 900  
F +34 917 912 901  
[spainsales@schaffner.com](mailto:spainsales@schaffner.com)

### Sweden

#### Schaffner EMC AB

Östermalmstorg 1  
114 42 Stockholm  
T +46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)  
[www.schaffner.com](http://www.schaffner.com)

### Switzerland

#### Schaffner EMV AG

Industrie Nord  
Nordstrasse 11e  
4542 Luterbach  
T +41 32 681 66 88  
T +41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

### Taiwan R.O.C.

#### Schaffner EMV Ltd.

20 Floor-2, No 97, Section 1, XinTai 5th Road  
22175 XiZhi District New Taipei City 22175  
T +886 2 2697 5500  
F +886 2 2697 5533  
[taiwansales@schaffner.com](mailto:taiwansales@schaffner.com)  
[www.schaffner.com.tw](http://www.schaffner.com.tw)

### Thailand

#### Schaffner EMC Co. Ltd.

Northern Region Industrial Estate  
67 Moo 4 Tambon Ban Klang  
Amphur Muangng P.O. Box 14  
51000 Lamphun  
T +66 53 58 11 04  
F +66 53 58 10 19  
[thailandsales@schaffner.com](mailto:thailandsales@schaffner.com)

### United Kingdom

#### Schaffner Ltd.

1, Oakmede Place  
Binfield  
RG42 4JF Berkshire  
T +44 118 9770070  
F +44 118 9792969  
[uksales@schaffner.com](mailto:uksales@schaffner.com)

### USA

#### Schaffner EMC Inc.

52 Mayfield Avenue  
Edison, New Jersey  
T +1 732 225 9533  
F +1 732 225 4789  
[usasales@schaffner.com](mailto:usasales@schaffner.com)  
[www.schaffnerusa.com](http://www.schaffnerusa.com)

#### Schaffner North America

6722 Thirlane Road  
24019 Roanoke, Virginia  
T +1 276 228 7943  
F +1 276 228 7953

#### Schaffner North America

823 Fairview Road  
24382 Wytheville, Virginia  
T +1 276 228 7943  
F +1 276 228 7258