


Output Filter for Motor Drives



- Reduction of drive output voltage dv/dt
- Reduction of voltage stress at motor windings
- Protect AC motors from destructive effect of peak voltages
- Increase of motor service life
- Improvement of system reliability



Performance indicators

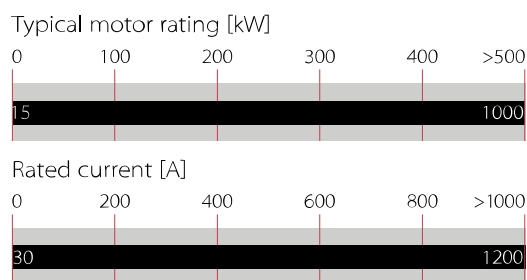

Technical Specifications

Maximum continuous operating voltage	3x760 VAC
Nominal operating voltage	690 VAC
Max. peak voltage	≤1850 V (according to EN 60034-25B)
Rated currents	30 to 1200 A @ 40°C
Overload capability	1.5 x rated current for 1 minute, once per hour
Typical dv/dt reduction	Factor 8 to 12
Voltage drop	<3 V @ 50 Hz
Motor frequency	0...60 Hz (with derating up to 120 Hz, see graph)
Motor cable length	Up to 500 m (see graph page 2)
Switching frequency	max. 16 kHz, depending on motor cable length and operating voltage (see graph)
High potential test voltage	P → E 2860 VAC, 1 s P → P 2860 VDC, 1 a
Overvoltage category	OV III (IEC 60664-1)
Temperature range (operation and storage)	-25°C to +100°C fully operational -40°C to 100°C transport and storage (25/100/21)
Protection category	IP 00
Flammability corresponding to	UL 94V-2
Design corresponding to	UL 61800-5-1, CSA 22.2 No.14, EN 61558-2-20

Approvals & Compliances



UL recognized up to 320 A


Features and Benefits

- Efficient reduction of high output voltage dv/dt from IGBT motor drives (as per IEC 60034-17/25)
- Restriction of overvoltages caused by line reflections on motor cables (as per IEC 60034-17/25)
- Protection of motor winding insulation from premature aging and destruction
- Increase service life of electric motors
- Patented solution without capacitors and resistors for ease of installation and increased reliability
- Less interference propagation towards neighbouring equipment or lines
- Output filter with low impedance, ideal for processes requiring exceptional precision and reproducibility of movements

Typical Applications

- Motor drive applications with short to medium motor cable length
- Machinery comprising servo or torque motors
- Submersible- and irrigation pumps
- HVAC equipment, incl. pumps, fans and compressors
- Elevators, hoisting and cranes
- Motor drives for process lines
- Applications where sine wave filters are not suited (e.g. high dynamic operation)

Typical electrical schematic

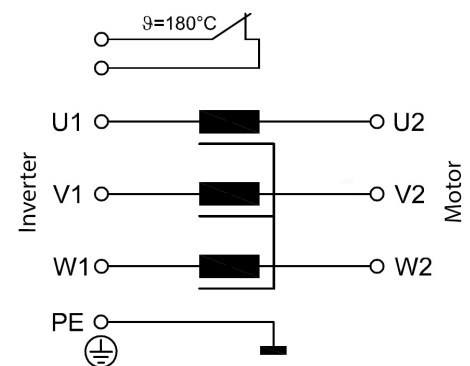

Filter Selection Table

Filter	Rated current @ 40°C/50 Hz [A]	Nominal inductance [mH]	**Typical power loss [W]	Input/ Output connections	Weight [kg]
FN5060HV-30-99	30	0.17	641	-99	12
FN5060HV-45-99	45	0.17	653	-99	12.5
FN5060HV-75-99	75	0.1	478	-99	23
FN5060HV-115-99	115	0.069	394	-99	27
FN5060HV-165-99	165	0.051	301	-99	36
FN5060HV-220-99	220	0.035	371	-99	44
FN5060HV-320-99	320	0.023	383	-99	59
FN5060HV-450-99	450	0.019	376	-99	68
FN5060HV-660-99	660	0.012	455	-99	100
FN5060HV-900-99	900	0.009	550	-99	111
FN5060HV-1200-99	1200	0.007	670	-99	139


* General purpose four-pole (1500 r/min) AC induction motor rated 690 V / 50 Hz.

** Power loss at 2 kHz switching frequency / 80 m motor cable length. Exact value depends upon the motor cable type and length, switching frequency and further stray parameters within the system.

Switching Frequency Vs. Motor Cable Length


Ensure the motor drive switching frequency is set to the required switching frequency (see filter selection table). Check the drives manual whether special settings are necessary. For any questions please contact the drives manufacturer.

Refer also to the “fPWM/cable length” diagram below:

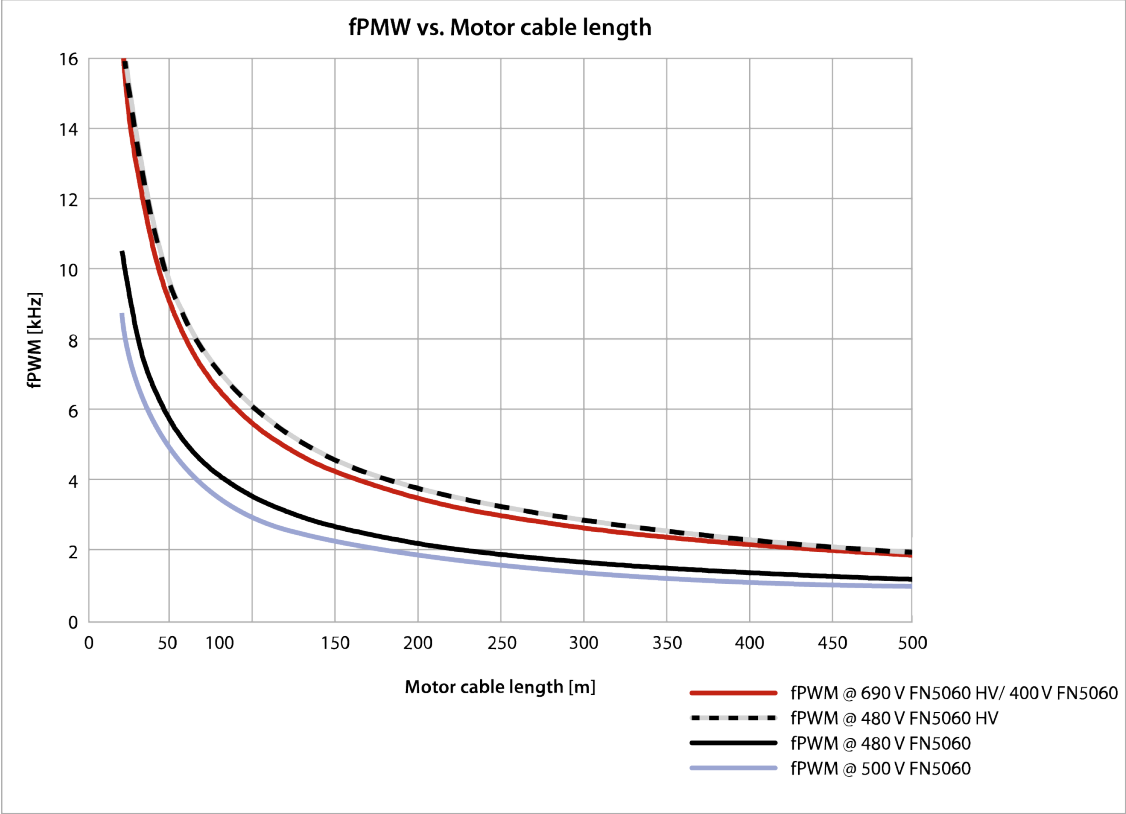

Motor Frequency Derating



The usage of an output filter when driving a motor at a frequency above 60Hz require to apply a derating on the filter rated current. Example: a filter rated for a current of 100 A used with a 50% derating can be used with a maxium current of 50 A. In other words, to achive the same rated current with a derating, a larger filter must be selected. See the chart below to calculate the derating in function of the motor frequency.

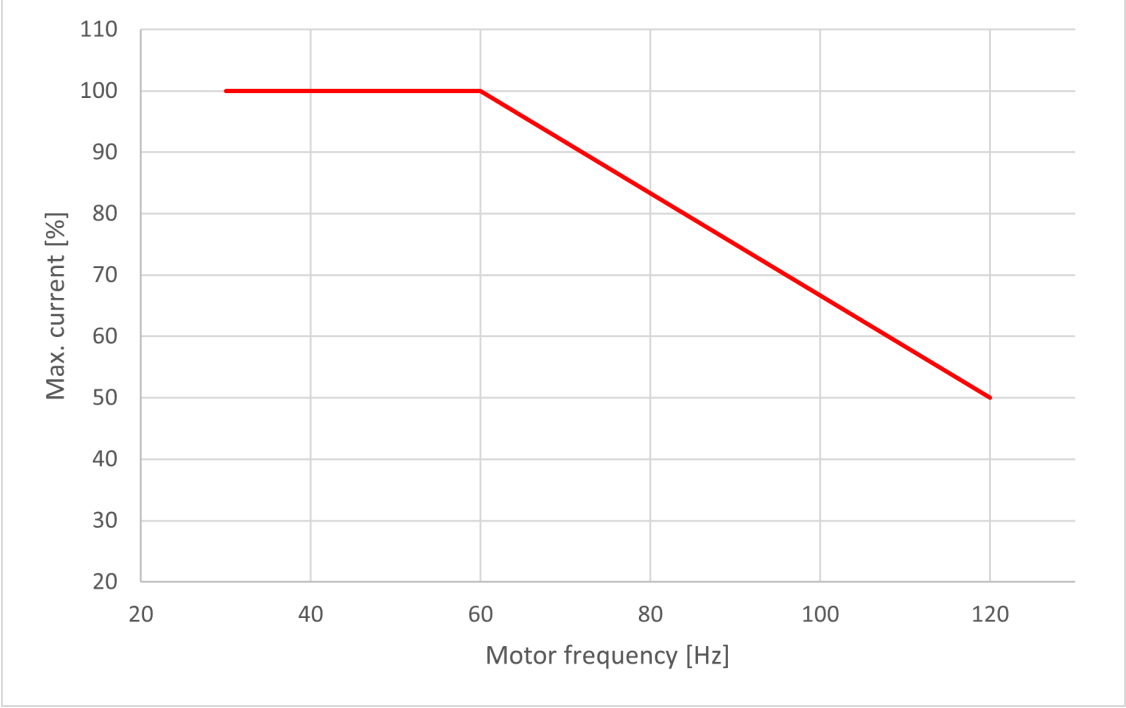

Temperature Monitoring Function

The temperature monitoring device opens a potential-free contact in the case of filter overtemperature (>180°C). The maximum switching capability is 5 A/240 V. The switch can be used, for example, in the input of a CNC controller or as the trip of a circuit breaker in order to interrupt the mains power supply.

Mechanical Data

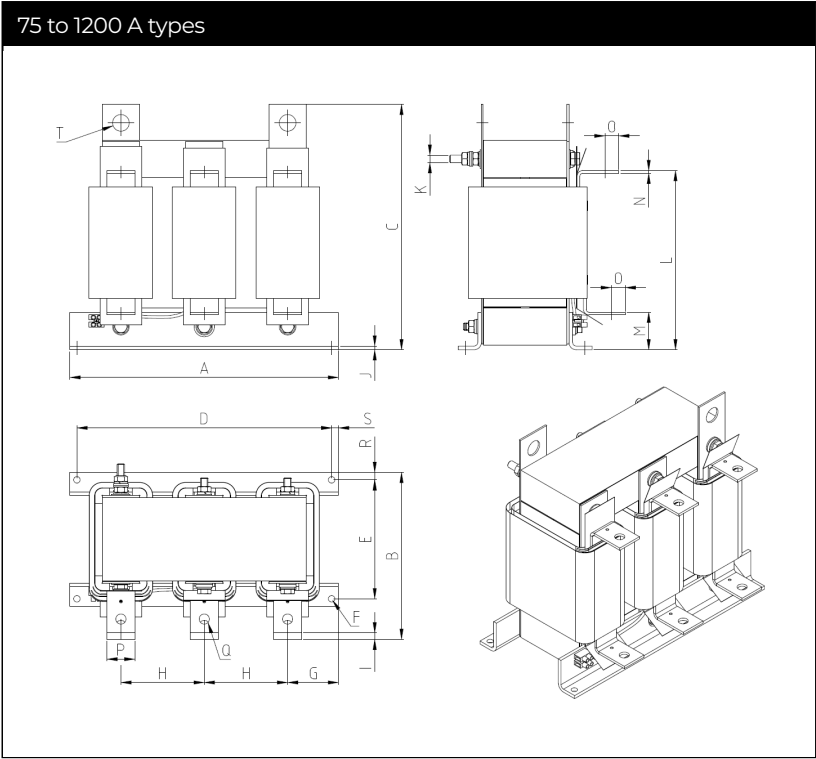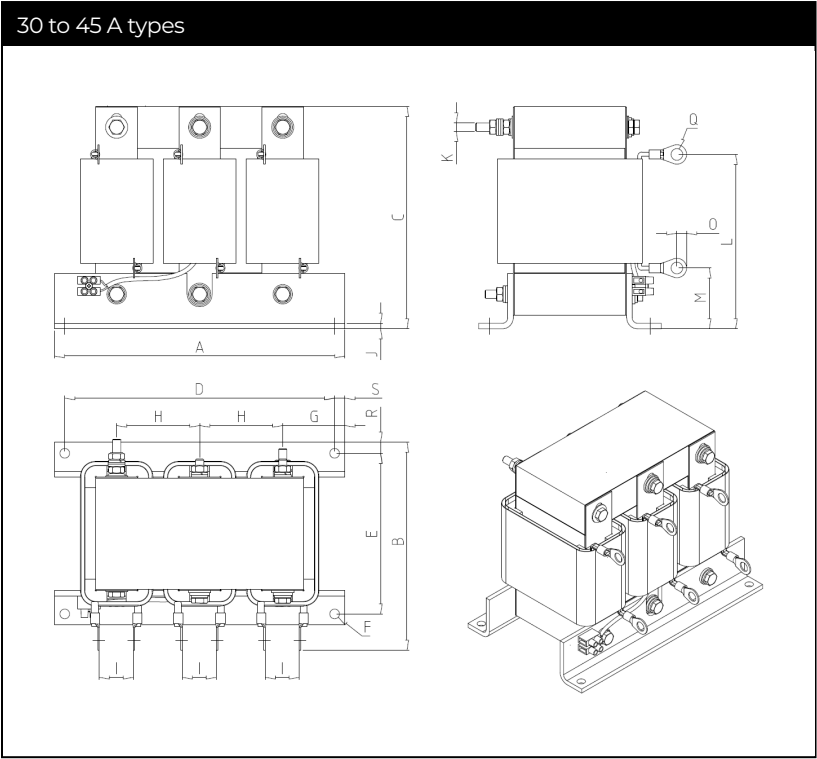

Dimensions

	30 A	45 A	75 A	115 A	165 A	220 A	320 A	450 A	660 A	900 A	1200 A
A	210	210	290	290	290	290	390	390	390	390	390
B	138	143	168	180	191	211	187	209	220	229	260
C	161	161	265	265	314	314	444	496	546	595	642
D +/-0.7	195	195	275	275	275	275	366	366	366	366	366
E +/-0.7	111	116	113.5	128.5	138.5	158.5	120.5	120.5	130.5	140.5	160.5
160.5F	Ø7(4x)	Ø7(4x)	Ø7(4x)	Ø7(4x)	Ø7(4x)	Ø7(4x)	Ø9(4x)	Ø9(4x)	Ø9(4x)	Ø9(4x)	Ø9(4x)
G	45	45	55	55	55	55	75	75	75	75	75
H	60	60	90	90	90	90	120	120	120	120	120
I	25	25	9	7	8	8	10	10	11	10	17
J	4	4	4	4	4	4	5	5	5	5	5
K	M6	M6	M8	M8	M8	M8	M8	M8	M8	M8	M8
L	126	126	194	194	245	244	331	381	432	481	533
M	44	44	41	41	41	40	75	76	76	75	75
N			3	3	4	4	6	5	6	6	8
O	7	7	15	15	15	15	15	25	25	25	25
P			30	30	30	30	30	50	50	50	50
Q	Ø8(6x)	Ø8(6x)	Ø11(6x)	Ø11(6x)	Ø11(6x)	Ø11(6x)	Ø11(6x)	Ø13.5(6x)	Ø13.5(6x)	Ø13.5(6x)	Ø13.5(6x)
R	8	8	8	8	8	8	12	12	12	12	12
S	7.5	7.5	7.5	7.5	7.5	7.5	12	12	12	12	12
T			Ø18(2x)	Ø18(2x)	Ø18(2x)	Ø18(2x)	Ø20(2x)	Ø20(2x)	Ø20(2x)	Ø20(2x)	Ø20(2x)

All dimensions in mm-; 1 inch = 25.4 mm
Tolerances according: ISO 2768-v/EN 22768-v, if not stated otherwise

Please note:
Make sure to consult and respect local, national and international safety codes.
Connect the protective earth terminal(s) first, before attempting to connect phase terminals.
Please consult the documents „Mounting and Installation Guidelines“ being shipped with the product.

For additional information please consult the document „Basis in EMC and Power Quality“, published in the download section of www.schaffner.com.

Headquarters, Global Innovation and Development

Switzerland
Schaffner Group
Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

Sales and Application Centers

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

China
Beijing Jingzhe Electronics Co.,Ltd.
Room 307, Building A, Jiahua Building, No.9
Shangdi 3rd Street, Haidian District
Beijing Yiting Ying
China
+86 13810880767
yingyiting@bjjingzhe.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

To find your local partner within Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.