

## FN2060A-16-06

SAP Code: 806063



- Chassis mount
- 16 A EMC filter with fast-ons
- General
- 1 Phase

Buy article now



### **Family Technical Specifications**

<sup>\*</sup> maximum RMS operating voltage at rated frequency or the maximum DC operating voltage \*\* for dedicated requests exceeding this specification (e.g. -40  $^{\circ}$ C or higher altitude) please contact your local Schaffner Sales office

### Approvals & Compliances












#### **Features and Benefits**

- FN 2060 two-stage filters are designed for easy and fast chassis mounting
- FN 2060 B versions without capacitors to earth comply to 1MOP for ME (medical equipment) acc. IEC 60601-1
- FN 2060 A version with low capacitance to earth for safety critical applications with necessity for low leakage currents
- All filters provide a high conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior
- FN 2060 two-stage filters are designed for noisy applications requiering good differential and common-mode attenuation
- FN 2060 filters are also available as single-stage filters (FN 2010 series)
- Various terminal options allow you to select the desired connection style

### **Typical Applications**

- Electrical and electronic equipment
- Consumer goods
- Household equipment
- Building automation
- Industrial applications
- Machinery
- Medical equipment
- Electronic data processing equipment
- Office automation and datacom equipment
- Various noisy applications requiering good filter performance

#### Typical electrical schematic

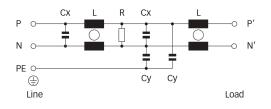

## **General Specification**


Voltage AC	250 (Volt)
Nominal Frequency	50
Rated Current @ambient	16
Ambient temperature [°C]	40

# **Electric Specification**

Leakage current (IEC60939) [mA]	0.07
Leakage current (Schaffner) [mA]	0.14
Input terminal	06 - faston 6.3x0.8/sold lug
Output terminal	06 - faston 6.3x0.8/sold lug
Resistance	1000 (Kiloohm)

# **Attenuation Specification**


DM attenuation @ 150kHz [dB]	13 (Decibels)
Inductance L1 [µH]	0.65 (Millihenry)
Capacitance Cx1 [µF]	0.33 (Microfarad)
Capacitance Cy1 [nF]	0.47 (Nanofarad)

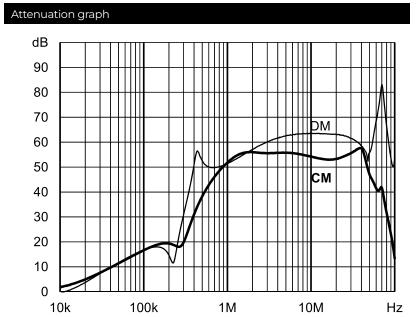

# **Mechanic Specification**

Length [mm]	64.8
Width [mm]	49.8
Height [mm]	40.3
Volume [cm3]	130 (Cubic Centimeter)
NetWeight [g]	260 (Gram)
Power Loss [W]	4.4 (Watt)

## Schaffner schemes

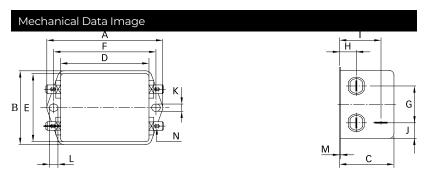

## **Dimensions**

A [mm]	85
B [mm]	54
C [mm]	40.3
D [mm]	64.8
E [mm]	49.8
F [mm]	75
G [mm]	27
H [mm]	12.3
I [mm]	29.8
J [mm]	11.4
K [mm]	5.3
L [mm]	6.3
M [mm]	0.7
N [mm]	$6.3 \times 0.8$
O [mm]	8.3
P [mm]	14.9