

FN2060-12-08

SAP Code: 821021



- Chassis mount
- 12 A EMC filter with screw terminals
- General
- 1 Phase

Buy article now



Family Technical Specifications

^{*} maximum RMS operating voltage at rated frequency or the maximum DC operating voltage ** for dedicated requests exceeding this specification (e.g. -40 $^{\circ}$ C or higher altitude) please contact your local Schaffner Sales office

Approvals & Compliances












Features and Benefits

- FN 2060 two-stage filters are designed for easy and fast chassis mounting
- FN 2060 B versions without capacitors to earth comply to 1MOP for ME (medical equipment) acc. IEC 60601-1
- FN 2060 A version with low capacitance to earth for safety critical applications with necessity for low leakage currents
- All filters provide a high conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior
- FN 2060 two-stage filters are designed for noisy applications requiering good differential and common-mode attenuation
- FN 2060 filters are also available as single-stage filters (FN 2010 series)
- Various terminal options allow you to select the desired connection style

Typical Applications

- Electrical and electronic equipment
- Consumer goods
- Household equipment
- Building automation
- Industrial applications
- Machinery
- Medical equipment
- Electronic data processing equipment
- Office automation and datacom equipment
- Various noisy applications requiering good filter performance

Typical electrical schematic

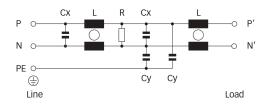

General Specification


Voltage AC	250 (Volt)
Nominal Frequency	50
Rated Current @ambient	12
Ambient temperature [°C]	40

Electric Specification

Leakage current (IEC60939) [mA]	0.66
Leakage current (Schaffner) [mA]	1.33
Input terminal	08 - M4 screw terminal
Output terminal	08 - M4 screw terminal
Resistance	470 (Kiloohm)

Attenuation Specification


CM attenuation @ 150kHz [dB]	15 (Decibels)
DM attenuation @ 150kHz [dB]	17 (Decibels)
Inductance L1 [µH]	0.58 (Millihenry)
Capacitance Cx1 [µF]	0.47 (Microfarad)
Capacitance Cyl [nF]	4.7 (Nanofarad)

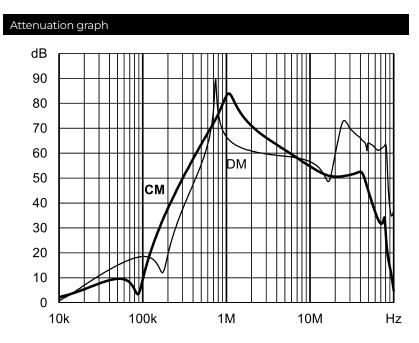

Mechanic Specification

Length [mm]	85
Width [mm]	54
Height [mm]	30.3
Volume [cm3]	139 (Cubic Centimeter)
NetWeight [g]	190 (Gram)
Power Loss [W]	6.2 (Watt)

Schaffner schemes

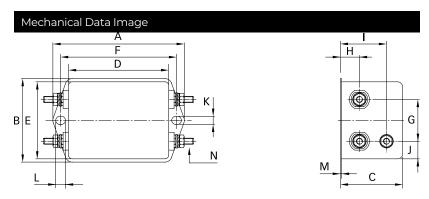

Dimensions

A [mm]	85
B [mm]	54
C [mm]	30.3
D [mm]	64.8
E [mm]	49.8
F [mm]	75
G [mm]	27
H [mm]	12.3
I [mm]	20.8
J [mm]	19.9
K [mm]	5.3
L [mm]	6.3
M [mm]	0.7
N [mm]	6.3 x 0.8
O [mm]	8.3
P [mm]	14.9